


## EDGE IP65 – MODULAR DOWNLIGHT




The EDGE IP65 offers a premium lighting solution specifically designed for clean room environments. It is compatible with both concealed ceilings and 15mm/24mm exposed T-grid systems. Mounting brackets come included as standard, and the fixture features a compact driver with optional dimming and emergency functionalities.



### SPECIFICATION

Colour Temperature CCT	3000K   4000K   5000K
Power	20W   27W   54W
Luminous Flux	2497-6743 lm
Efficacy	Up to 124 lm/W
Controls	Fixed output   SwitchDim   DALI
Distribution	Direct
Finish	White
Dimensions	W 497 x H 497 x D 88 mm
Dimensions	W 597 x H 597 x D 88 mm
Dimensions	W 1197 x H 297 x D 88 mm
Dimensions	W 1197 x H 597 x D 88 mm
Operating Voltage	220-240V 50/60Hz
Inrush current	5A 37µs - 12A 50µs
Material	Mild steel/polycarbonate
Installation	Recessed
Ingress Protection	IP65 (front face only)
Impact Rating	IK06
Weight	4.5-9.4 kg
Optional	Corridor function   emergency
Lifetime	50,000hrs
Operating Temperature	-25°C ~50°C
Conformity	UKCA, CE, RoHS
Warranty	5 Years

### DIMENSIONS/PHOTOMETRY

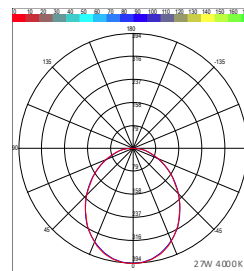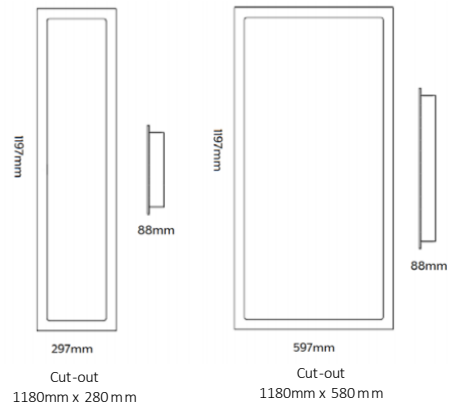

## PRODUCT ORDER CODE

CODE	POWER	CCT	FINISH	WEIGHT	REPLACES	DIMENSIONS	LUMEN OUTPUT
EDGEIP65-204W497	20W	4000K	White	4.5 kg	2 x 36W PL	497 x 497 mm	2497 lm
EDGEIP65-204W597	20W	4000K	White	5.4 kg	4 x 14W T5	597 x 597 mm	2497 lm
EDGEIP65-274W597	27W	4000K	White	5.4 kg	4 X 24W T5	597 x 597 mm	3371 lm
EDGEIP65-204W1197	20W	4000K	White	5.4 kg	2 X 28W T5	1197 x 297 mm	3371 lm
EDGEIP65-274W1197	27W	4000K	White	5.4 kg	2 X 28W T5	1197 x 297 mm	4995 lm
EDGEIP65-544W1197	54W	4000K	White	9.4 kg	2 X 54W T5	1197 x 597 mm	6743 lm

## OPTIONS

CODE	DESCRIPTION
3	3000K
5	5000K
F	Fixed output driver
D	DALI
S	SwitchDIM
SE	Standard emergency kit
CF	Corridor function
MWP	Remote programmable microwave
WL	Wireless control system