




KEY FEATURES

- Fully adjustable single LED surface mounted framelight
- Twin version available
- Medium beam multi-faceted reflector as standard
- Paired with Tridonic system for outstanding efficacy
- Beam angle and colourway options
- Two gimbal fixing positions for added flexibility
- Excellent luminaire efficacy of up to 112.9 llm/W
- Life up to >60,000 hours (L70 / F10)

DIMENSIONS

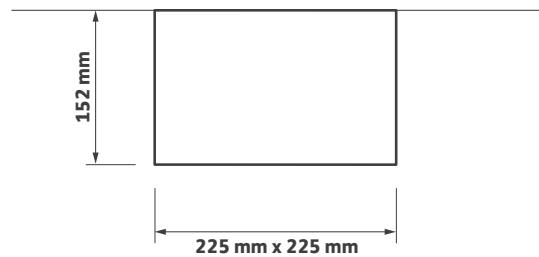

ORDERING INFORMATION

OPTIONS

Output (Llm)	Power (tcW)	Colour	Model Ref.
1025	10	830	ADE-10-3-W
1025	9	840	ADE-9-4-W
2000	19	830	ADE-18-3-W
2000	18	840	ADE-18-4-W
3000	31	830	ADE-31-3-W
3000	29	840	ADE-29-4-W

Please select from the options below.


Black body and gimbal	/B
SwitchDIM, DALI or DSI	/ECO
Narrow beam	/NB
Wide beam	/WB
High colour rendering option (Ra 90)	/R9



/NB
Narrow beam reflector



/WB
Wide beam reflector



/ECO
SwitchDIM, DALI or DSI



/R9
High colour rendering (Ra 90)



/B
Black body and gimbal