




KEY FEATURES

- High end mini linear downlight
- IP44 luminaire with a wide variety of options
- Samsung high power, high efficiency LEDs
- Ra90 High colour rendering
- Available with over 100 lm/tcW
- Extruded aluminium heatsink
- Injection moulded low glare matt-black baffle
- High clarity 35° medium beam lens
- Ultra slim clean-line bezel
- Long life - >60,000 Hours L80/F50
- Short circuit, overload and temperature protection
- 500mm mains lead

DIMENSIONS

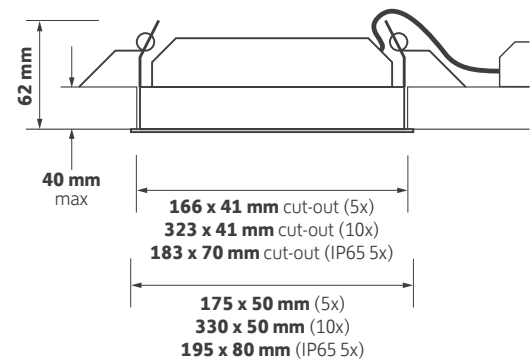

ORDERING INFORMATION

Lens	Luminaire Output (Llm)	Power (tcW)	Colour	Model Ref.
5x	525	7	930	AUK-5-7-3-W
5x	525	7	940	AUK-5-7-4-W
5x	1050	13	930	AUK-5-13-3-W
5x	1050	13	940	AUK-5-13-4-W
10x	1050	13	930	AUK-10-13-3-W
10x	1050	13	940	AUK-10-13-4-W
10x	2100	23	930	AUK-10-23-3-W
10x	2100	23	940	AUK-10-23-4-W

OPTIONS

Please select from the options below.


White baffle	/W
Gold baffle	/GO
Black bezel RAL9005	/B
Grey bezel RAL9006	/G
10° super narrow beam lens	/SNB
15° narrow beam lens	/NB
50° wide beam lens	/WB
Plaster-in, trim-less bezel	/PI
Digital addressable lighting interface	/T+DALI
Casambi wireless network (inc dim)	/BTC
Emergency conversion	/EM
DALI Emergency conversion	/EMD
IP65 (5x only)	/65



/W
White baffle




/GO
Gold baffle

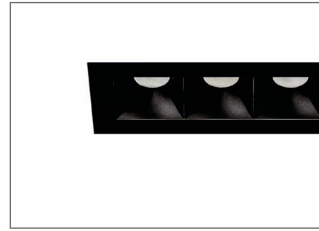

/B
Black bezel RAL9005



/G
Grey bezel RAL9006



/PI
Plaster-in, trim-less bezel




/SNB
10° narrow beam lens




/NB
15° narrow beam lens




/WB
50° wide beam lens



/T+DALI
Digital addressable lighting interface



/BTC
Casambi wireless network
(inc dim)



/EM
Emergency conversion



/EMD
DALI Emergency conversion



/65
IP65 version (5x only)