




KEY FEATURES

- Compact fire rated IP65 LED downlight
- Complete with white bezel
- Multi-faceted reflector
- Choice of colour temperatures
- Brushed and black bezel options
- Supplied with IP ceiling gasket
- Accredited fire rating: FR30, FR60 and FR90*

* Fire Rating in accordance with BS 476:Part 21: 1987, load bearing

timber floor with softwood timber joists.

DIMENSIONS

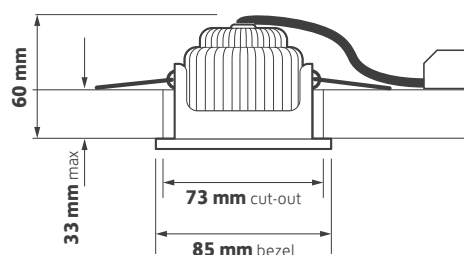

ORDERING INFORMATION

Luminaire Output	Power	Colour	Model Ref.
Llm	tcW		
750	8	830	EVO-8-3-W
775	8	840	EVO-8-4-W

OPTIONS

Please select from the options below.


Brushed bezel	TA149/BA
Black bezel	TA149/B
Phase-cut mains dimming	/MDIM
SwitchDIM, DALI or DSI	/ECO
3 hour emergency conversion	/EM
3 hour self-test and DALI emergency conversion	/EMD
Casambi wireless network (inc dim)	/BTC




TA149/BA
Brushed bezel



TA149/BL
Black bezel



/MDIM
Phase-cut mains dimming




/ECO
SwitchDIM, DALI or DSI



/EM
3 hour emergency conversion*



/EMD
3 hour self-test and DALI emergency conversion*



/BTC
Casambi wireless network
(inc dim)

*Emergency remote indicators and ILEMs are not IP65 or fire rated