




KEY FEATURES

- Professional, deep adjustable LED downlight
- Minimal die-cast low profile
- Bezel, white RAL9003
- Life >50,000 hours L70/F50
- Injection moulded 36° faceted reflector
- High efficacy, low glare
- No visible flicker (IEEE PAR1789 2015)
- Dimming, DALI and emergency options
- 5 year warranty

DIMENSIONS

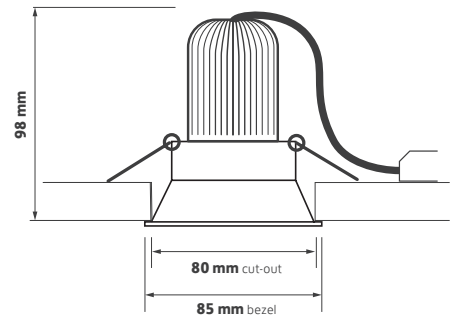


ORDERING INFORMATION

Output lm	Power tcW	Colour	Model Ref.
750	8	830	GEN3-8-3-W
775	8	840	GEN3-8-4-W


OPTIONS

Please select from the options below.

Phase-cut mains dimming	/MDIM
SwitchDIM, DALI or DSI	/ECO
Casambi wireless network (inc dim)	/BTC
3 hour emergency conversion	/EM
3 hour self-test and DALI emergency conversion	/EMD



/MDIM
Phase-cut mains dimming



/ECO
SwitchDIM, DALI or DSI




/BTC
Casambi wireless network
(inc dim)




/EM
3 hour emergency conversion



/EMD
3 hour self-test and DALI emergency conversion

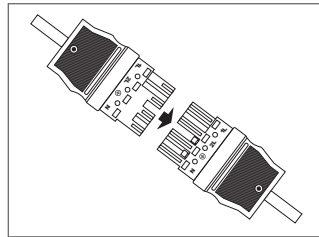

Product variations
Plug and Sockets



Product variations
Any RAL colour