


KEY FEATURES

- Contemporary IK10 / IP65 rated LED bulkhead
- High transmission, low spotting TP(a) rated opal diffuser
- Twist & lock bezel to conceal fixings
- UL94 polycarbonate body with back-lit halo effect option
- Tridonic LED and driver system inside
- 3 step MacAdam (SDCM)
- Long life up to 72,000h L80
- DALI, wireless control and emergency options
- Integral microwave presence detector options
- 5 year warranty

DIMENSIONS

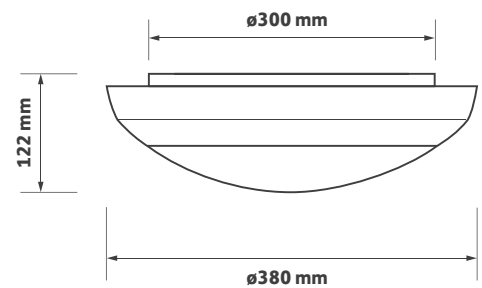

ORDERING INFORMATION

Luminaire output (lm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1200	830	10	181	120	IRIS-10-3-W
1250	840	10	191	125	IRIS-10-4-W
1600	830	14	172	114	IRIS-14-3-W
1700	840	14	182	121	IRIS-14-4-W
2225	830	21	164	106	IRIS-21-3-W
2350	840	21	172	112	IRIS-21-4-W

OPTIONS

Options	Suffix
Black bezel	/B
Back-lit halo effect	/HALO
Anti-tamper diffuser fixing screws	/AT
Emergency - Integral indicator	/EMI, /EMDI




/B
Black bezel




/HALO
Back-lit halo effect




/AT
Anti-tamper diffuser
screws



/ECO
SwitchDIM / DALI / DSI



/SO
Integral motion sensor
On / off
(not available with /ECO)

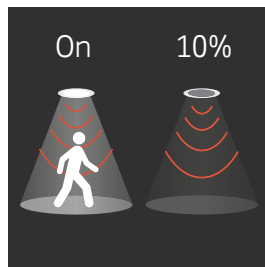

/SD
Integral motion sensor
On / 10% dim
(not available with /ECO)



/BTC
Casambi wireless
network inc. dimming



/EMI
Emergency
Integral indicator



/EMDI
DALI emergency
Integral indicator