





KEY FEATURES

- Decorative glass LED luminaire
- Semi-opaque glass diffuser with subtle marbling effect
- Polished chrome fixings
- Tridonic CLE board and driver system for optimum performance
- Dimming options
- Short circuit, overload and temperature protection
- Life >72,000 hours L80 F10

DIMENSIONS

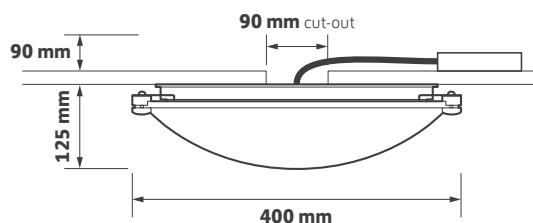

With spacer for mounting on solid surfaces.

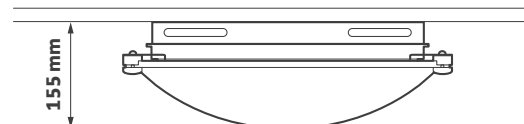

ORDERING INFORMATION

Luminaire Output lm	Power tcW	Colour	Model Ref.
1725	15	830	JAK-15-3
1700	15	840	JAK-15-4


OPTIONS

Please select from the options below.


SwitchDIM, DALI or DSI	/ECO
Single Point Connection to an ILEM product	/SPC
Spacer for solid surfaces	SCR146




SCR146
Spacer for solid surfaces



/ECO
SwitchDIM, DALI or DSI



IEM
Please see IEM datasheet



/SPC
Single Point Connection to an IEM product