System HR-OPTI
Ref. A01844+C28090N00
Ref. arch C1844+42121

NEW

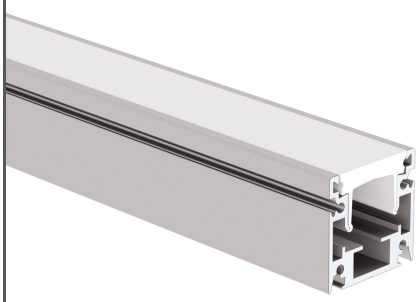

IK10 IP68

- For installation on facades
- Designed for IP68 and IK10 protection ratings
- Corrosion resistance at high salinity
- Corresponds to the width of the HR-MAX facade system
- Continuous lighting angle adjustment

APPLICATION
- decorative lighting

MOUNTING
- to the surface, using dedicated accessories

ADDITIONAL INFORMATION
- possibility to fasten the lighting fixture with the back or side to the mounting surface
- possibility of smooth transition from a facade into an in-ground lighting fixture

TECHNICAL DRAWING

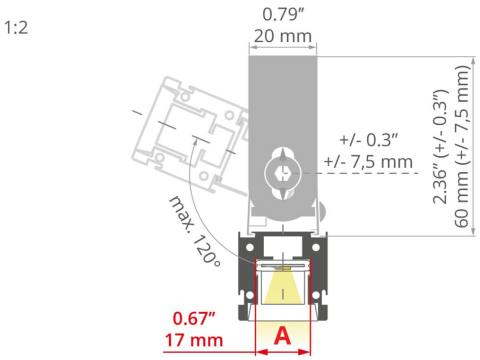

LEDS
- 2700K, 3000K, 4000K, TW, RGB, RGBW

DRIVERS/CONTROLS
- on/off, mains dimmable, DALI, Casambi

TECHNICAL SPECIFICATIONS

Material	aluminum	IP protection rating	68
Color	silver anodized	Impact protection IK10	yes

SAMPLE PROJECTS

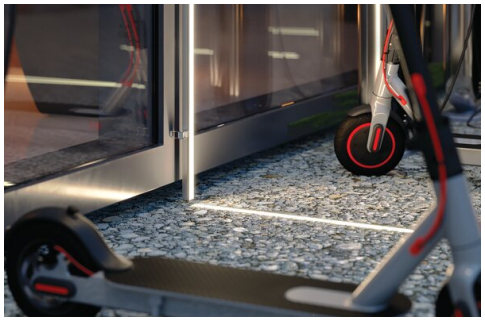
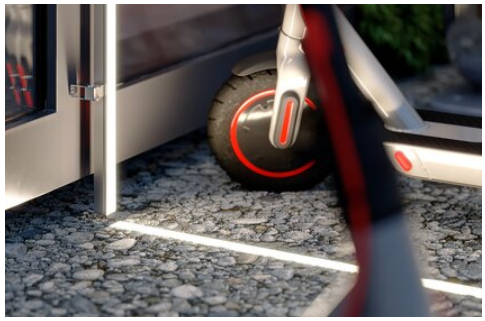

Impact Lighting Solutions Ltd | www.impactlightingsolutions.com | sales@impactls.com | 01865 989 830
Unit C6 Grange Court Business Park, Barton Lane, Abingdon, Oxfordshire, OX14 3NB

System HR-OPTI
Ref. A01844+C28090N00
Ref. arch C1844+42121

RELATED SYSTEMS > FACADE

HR-OPTI
A01844
Ref. arch C1844

RELATED ACCESSORIES > RELATED COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
HR-21		PMMA	45 %	frosted	B17152M 17152

RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
HR-OPTI-STN		stainless steel	gray	C28019N00 24387

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES

MOUNTING BRACKET
HR-OPTI-A
HR-OPTI-A

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS

System HR-OPTI
Ref. A01844+C28090N00
Ref. arch C1844+42121

MOUNTING BRACKET
HR-OPTI
C28090N00
Ref. arch 42121

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER

HERMETIC COUPLER
C28239C02
Ref. arch 42702

GLAND
M16x1,5
C42271C02
Ref. arch 42271

ANGULAR GLAND
M16x1,5-L90
C28158C02
Ref. arch 42289