GUS 90

28W 2700lm-2900lm

GUS 72

15W 1200lm-1300lm
21W 1600lm-1700lm

GUS 45

7W 450lm-480lm
8W 550lm-650lm

GUS TRACK

Sleek, compact spotlight with integrated in-track LED driver.

Available with a choice of fixed or adjustable optical lenses for versatile lighting control.

Narrow, medium and wide beam angles are available for different lighting applications

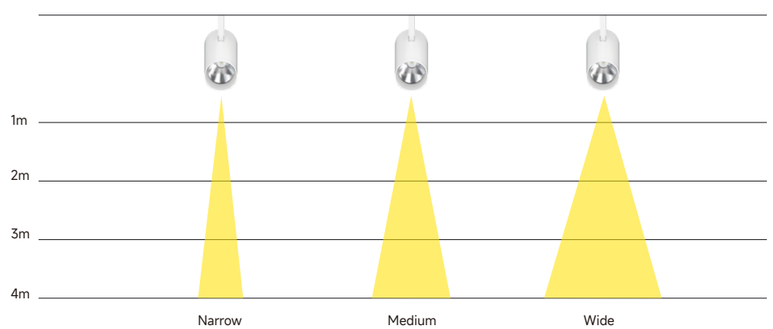

GUS - 45

Track Spotlight

White Black



Spotlight

GUS 45

CE 5 Years Warranty AC 220-240V IP 20 CRI >90

Features

- perfectly combines functionality with aesthetics.
- Its elegant design features an integrated LED driver within the housing.
- The adjustable head rotates 355° and tilts 90° for precise light direction.
- Optimised passive cooling system maintains low operating temperatures, ensuring a long LED lifespan.

Specifications

- Dimming modes:Non-Dim, TRIAC DIM
  Beam angle: 20°,35°,55°
- Physical: aluminium, powder coating
  Accessories: Honeycomb mesh

Type

Φ55 Φ72

Light distribution

Spotlight

Track Adapter

3-Circuits

7W 450lm-480lm with TRIAC driver

Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
GUS-45-7-3-15-TRIAC	Φ45*153mm	550 lm	450 lm	5W	7W	90	3000K	15°
GUS-45-7-3-24-TRIAC	Φ45*153mm	550 lm	480 lm	5W	7W	90	3000K	24°
GUS-45-7-3-36-TRIAC	Φ45*153mm	550 lm	450 lm	5W	7W	90	3000K	36°
GUS-45-7-3-45-TRIAC	Φ45*153mm	550 lm	450 lm	5W	7W	90	3000K	45°

8W 550lm-650lm with ON-OFF driver

Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
GUS-45-8-3-15-B	Φ45*153mm	650 lm	550 lm	6W	8W	90	3000K	15°
GUS-45-8-3-24-B	Φ45*153mm	650 lm	600 lm	6W	8W	90	3000K	24°
GUS-45-8-3-36-B	Φ45*153mm	650 lm	550 lm	6W	8W	90	3000K	36°
GUS-45-8-3-45-B	Φ45*153mm	650 lm	550 lm	6W	8W	90	3000K	45°

GUS Series

TRACK SPOTLIGHT

Impact
LIGHTING SOLUTIONS

GUS - 72 / 90

Track Spotlight

White Black





Spotlight

GUS 72/90

CE | 5 Years Warranty | AC 220-240V | IP 20 | CRI >90

Features

- Combines functionality with aesthetics through an elegant design featuring an integrated LED driver within the housing.
- The adjustable head offers 355° rotation and 90° tilt for flexible light direction.
- Optimised passive cooling system maintains low temperatures, ensuring a long LED lifespan.

Specifications

- Dimming Modes: Non-Dim, TRIAC Dim
- Beam Angles: 15°, 25°, 30°
- Construction: Aluminium with powder-coated finish
- Accessories: Honeycomb mesh

Type

Φ72 Φ90

Light distribution

Spotlight

Track Adapter

1-Circuit (Standard) 3-Circuits

15W 1200lm-1300lm

Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
GUS-72-15-3-15	Φ72*138mm	1500 lm	1200 lm	13W	15W	90	3000K	15°
GUS-72-15-4-15	Φ72*138mm	1600 lm	1300 lm	13W	15W	90	4000K	15°
GUS-72-15-3-25	Φ72*138mm	1500 lm	1200 lm	13W	15W	90	3000K	25°
GUS-72-15-4-25	Φ72*138mm	1600 lm	1300 lm	13W	15W	90	4000K	25°
GUS-72-15-3-30	Φ72*138mm	1500 lm	1200 lm	13W	15W	90	3000K	30°
GUS-72-15-4-30	Φ72*138mm	1600 lm	1300 lm	13W	15W	90	4000K	30°

21W 1600lm-1700lm

Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
GUS-72-21-3-15	Φ72*138mm	2000 lm	1600 lm	18W	21W	90	3000K	15°
GUS-72-21-4-15	Φ72*138mm	2100 lm	1700 lm	18W	21W	90	4000K	15°
GUS-72-21-3-25	Φ72*138mm	2000 lm	1600 lm	18W	21W	90	3000K	25°
GUS-72-21-4-25	Φ72*138mm	2100 lm	1700 lm	18W	21W	90	4000K	25°
GUS-72-21-3-30	Φ72*138mm	2000 lm	1600 lm	18W	21W	90	3000K	30°
GUS-72-21-4-30	Φ72*138mm	2100 lm	1700 lm	18W	21W	90	4000K	30°

28W 2700lm-2900lm

Code	Size	LED LM	System LM	LED W	System W	CRI	CCT	Beam
GUS-90-28-3-18	Φ90*200mm	3400 lm	2700 lm	25W	28W	90	3000K	18°
GUS-90-28-4-18	Φ90*200mm	3600 lm	2900 lm	25W	28W	90	4000K	18°
GUS-90-28-3-20	Φ90*200mm	3400 lm	2700 lm	25W	28W	90	3000K	30°
GUS-90-28-4-30	Φ90*200mm	3600 lm	2900 lm	25W	28W	90	4000K	30°
GUS-90-28-3-45	Φ90*200mm	3400 lm	2700 lm	25W	28W	90	3000K	45°
GUS-90-28-4-45	Φ90*200mm	3600 lm	2900 lm	25W	28W	90	4000K	45°