


SPECIFICATION

Distribution	Direct/indirect
Colour Temperature CCT	3000K   4000K
Optic	70°~75° lens
Output	1   2
Finish	Grey   white   black
Efficacy	Up to 188 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output   DALI   Casambi
Installation	Surface   suspended
Dimensions	W 59 mm x H 80 mm
Standard Lengths	L 1148 mm – 2831 mm
Connection Options	Start/end   middle (for in-line connections)
Material	Extruded aluminium
Ingress Protection	IP40
Impact Rating	IK05
Operating Voltage	220-240V 50/60Hz
Emergency Options	Standard   DALI
Lifetime	100000/L80B10
Operating Temperature	-0°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	2.5kg p/m
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

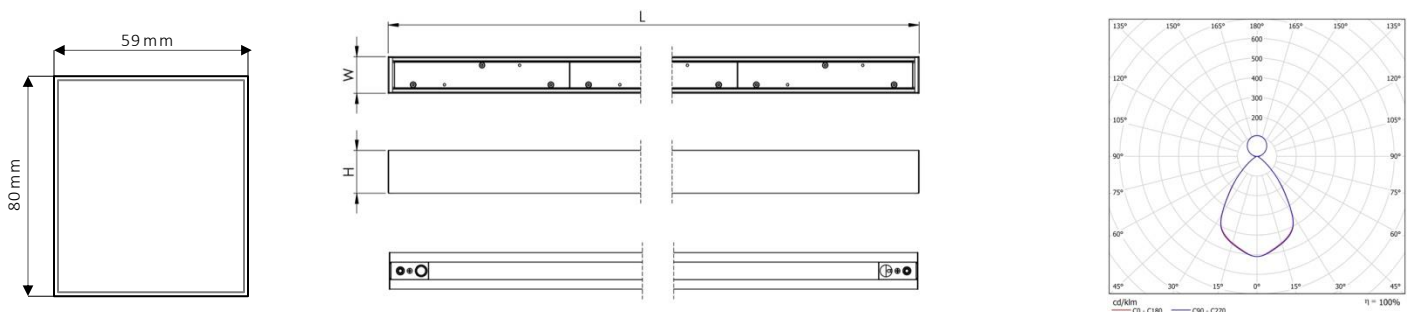

ORDER CODE

LITO58-DI-3-70-1-A-1148

PREFIX	DISTRIBUTION	CCT	OPTIC	OUTPUT	FINISH	LENGTH (mm)
<b>LITO58-</b>	DI Direct/indirect	<b>3</b>	70 70°-75° lens	<b>1</b>	<b>A</b> Grey RAL9006S	<b>1148</b>
		3000K		Low		<b>1428</b>
		<b>4</b>		<b>2</b> Standard	<b>W</b> White RAL9003S <b>B</b> Black RAL9005S	<b>2831</b>
		4000K				

OPTIONS

<b>S</b>	Start/end module for connecting continuous systems
<b>M</b>	Middle module for connecting continuous systems
<b>EM</b>	Emergency version 3 hours
<b>EMS</b>	Emergency version equipped with an autonomous testing system 3 hours
<b>EMD</b>	Emergency version 3 hours with DALI interface
<b>SUS</b>	Suspension wire kit 1.5m adjustable, 1pcs
<b>W</b>	Wall-mounting bracket, 1pcs
<b>D</b>	DALI dimming functionality
<b>C</b>	Casambi wireless lighting controls



STANDARD LENGTHS – 3000K

LENGTH (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	OPTIC	LUMENS (lm)
1148	Direct	3000K	1	37,2W	70°-75° lens	1148
1148	Direct	3000K	2	53,3W	70°-75° lens	1148
1428	Direct	3000K	1	44,7W	70°-75° lens	1428
1428	Direct	3000K	2	64,7W	70°-75° lens	1428
2831	Direct	3000K	1	87,4W	70°-75° lens	2831
2831	Direct	3000K	2	126,7W	70°-75° lens	2831

STANDARD LENGTHS – 4000K

LENGTH (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	OPTIC	LUMENS (lm)
1148	Direct	4000K	1	37,2W	70°-75° lens	1148
1148	Direct	4000K	2	53,3W	70°-75° lens	1148
1428	Direct	4000K	1	44,7W	70°-75° lens	1428
1428	Direct	4000K	2	64,7W	70°-75° lens	1428
2831	Direct	4000K	1	87,4W	70°-75° lens	2831
2831	Direct	4000K	2	126,7W	70°-75° lens	2831