

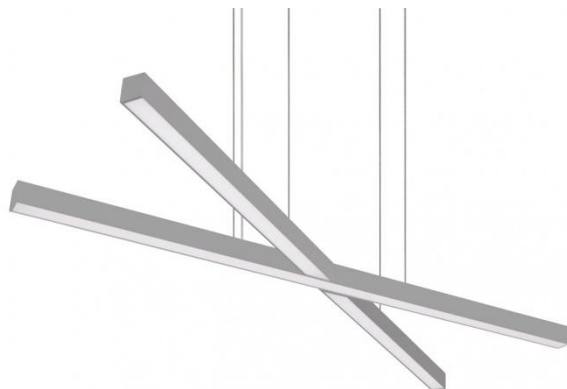


SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K 4000K
Optic/Diffuser	Opal MPO
Output	1 2 3
Finish	Grey white black
Efficacy	Up to 131 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output DALI Casambi
Installation	Surface suspended
Dimensions	H 74 mm
Standard Lengths	L 1952 mm
Shape	Cross V-shape
Material	Extruded aluminium
Ingress Protection	IP40
Impact Rating	IK05
Operating Voltage	220-240V 50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-0°C ~35°C, Glow
Conformity	UKCA, CE, RoHS, IEC:I
Weight	6.5kg p/m
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

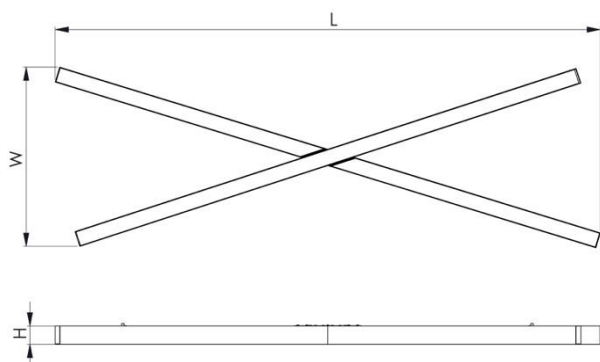

ORDER CODE LITOV-D-3-O-1-A-1952

PREFIX	DISTRIBUTION	CCT	DIFFUSER/OPTIC	OUTPUT	FINISH	LENGTH (mm)
LITOV-	D Direct	3 3000K	O Opal	1 Low	A Grey RAL9006S	1952
		4 4000K	MPO Micro-prismatic	2 Standard	W White RAL9003S	
				3 Medium	B Black RAL9005S	

OPTIONS

SUS	Suspension wire kit 1.5m adjustable, 1pcs
D	DALI dimming functionality
C	Casambi wireless lighting controls
RAL	Custom RAL colour



STANDARD LENGTHS – 4000K - OPAL

LENGTH (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
1952	Direct	4000K	1	43W	Opal	5625
1952	Direct	4000K	2	62.1W	Opal	7665
1952	Direct	4000K	3	88.2W	Opal	10535