SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K | 4000K
Optic/Diffuser	Opal
Output	1 | 2 | 3
Finish	White | Black | custom RAL
Efficacy	Up to 126 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output | DALI | Casambi
Installation	Surface | suspended
Dimensions	H 80 mm
Diameters	Ø600 | Ø900 | Ø1200 mm
Material	Steel
Ingress Protection	IP40
Impact Rating	IK02
Operating Voltage	220-240V 50/60Hz
Emergency Options	Standard | DALI
Lifetime	50000/L80B10
Operating Temperature	0°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	4.6kg (Ø600mm)
Warranty	5 Years

DIMENSIONS/PHOTOMETRY

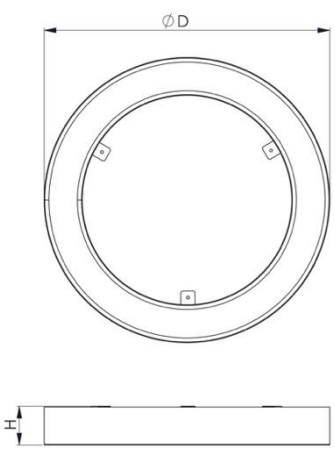



ORDER CODE

ODIN-3-O-1-W-600

PREFIX	CCT	DIFFUSER/OPTIC	OUTPUT	FINISH	DIAMETER (mm)
ODIN-	**3** 3000K **4** 4000K	**O** Opal	**1** Low **2** Standard **3** Medium	**W** White RAL9003S **B** Black RAL9005S **RAL** Custom RAL colour	**600** **900** **1200**

OPTIONS

SUS	Suspension Wire Kit 1.5m Adjustable, 1pcs
CABLE	Cable 3x0.75mm² for suspended luminaire up to 2.0 meters, transparent, 1pcs
CABLE-SET	Cable and suspension wire clip set, 4pcs
W-SUS	Suspension 3 x wire set with round cap, 1.5m adjustable, white, 1pcs
SUR	Surface Mounting Plates, white steel
D	DALI dimming functionality
C	Casambi wireless lighting controls

STANDARD DIAMETERS – 3000K – 4000K – OPAL

DIAMETER (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
600	Direct	3000K	1	16,9W	Opal	1924
600	Direct	3000K	2	23,6W	Opal	2621
600	Direct	3000K	3	34,6W	Opal	3603
900	Direct	3000K	1	26,4W	Opal	3148
900	Direct	3000K	2	37,7W	Opal	4289
900	Direct	3000K	3	54,9W	Opal	5896
1200	Direct	3000K	1	34,8W	Opal	4197
1200	Direct	3000K	2	49,8W	Opal	5719
1200	Direct	3000K	3	72,4W	Opal	7861
600	Direct	4000K	1	16,9W	Opal	2014
600	Direct	4000K	2	23,6W	Opal	2744
600	Direct	4000K	3	34,6W	Opal	3772
900	Direct	4000K	1	26,4W	Opal	3295
900	Direct	4000K	2	37,7W	Opal	4491
900	Direct	4000K	3	54,9W	Opal	6173
1200	Direct	4000K	1	34,8W	Opal	4394
1200	Direct	4000K	2	49,8W	Opal	5987
1200	Direct	4000K	3	72,4W	Opal	8231