



SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K 4000K
Optic/Diffuser	Opal MPO
Output	1 2
Finish	White Black custom RAL
Efficacy	Up to 144 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output DALI Casambi
Installation	Surface suspended
Dimensions	H 100 mm
Diameters	Ø300 Ø450 Ø600 Ø900 Ø1140 mm
Material	Steel
Ingress Protection	IP40
Impact Rating	IK02
Operating Voltage	220-240V 50/60Hz
Emergency Options	Standard DALI
Lifetime	50000/L80B10
Operating Temperature	0°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	2.5kg (Ø300mm)
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

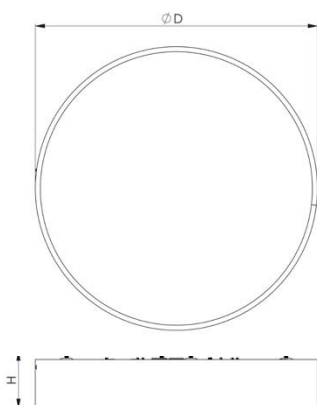

ORDER CODE

OYAS-3-O-1-W-300

PREFIX	CCT	DIFFUSER/OPTIC	OUTPUT	FINISH	DIAMETER (mm)
OYAS-	3	O	1	W	300
	3000K	Opal	Low	White RAL9003S	450
	4	MPO	2	B	600
	4000K	Micro-prismatic	Standard	Black RAL9005S	900
				RAL Custom RAL colour	1140

OPTIONS

EM	Emergency version 3 hours
EMS	Emergency version equipped with an autonomous testing system 3 hours
EMD	Emergency version 3 hours with DALI interface
CABLE	Cable 3x0.75mm ² for suspended luminaire up to 2.0 meters, transparent, 1pcs
CABLE-SET	Cable and suspension wire clip set, 4pcs
SUS	Suspension 3 x wire set with round cap, 1.5m adjustable, white, 1pcs
D	DALI dimming functionality
C	Casambi wireless lighting controls



STANDARD DIAMETERS – 3000K - OPAL

DIAMETER (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
300	Direct	3000K	1	15,9W	Opal	1919
300	Direct	3000K	2	21,4W	Opal	2614
450	Direct	3000K	1	30,3W	Opal	3880
450	Direct	3000K	2	44,3W	Opal	5272
600	Direct	3000K	1	45W	Opal	5948
600	Direct	3000K	2	63,6W	Opal	8105
900	Direct	3000K	1	73W	Opal	10057
900	Direct	3000K	2	94,1W	Opal	12832
1140	Direct	3000K	1	112W	Opal	15765
1140	Direct	3000K	2	145,9W	Opal	20115

STANDARD DIAMETERS – 4000K - OPAL

DIAMETER (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
300	Direct	4000K	1	15,9W	Opal	2009
300	Direct	4000K	2	21,4W	Opal	2737
450	Direct	4000K	1	30,3W	Opal	4062
450	Direct	4000K	2	44,3W	Opal	5520
600	Direct	4000K	1	45W	Opal	6227
600	Direct	4000K	2	63,6W	Opal	8562
900	Direct	4000K	1	73W	Opal	10530
900	Direct	4000K	2	94,1W	Opal	13435
1140	Direct	4000K	1	112W	Opal	16506
1140	Direct	4000K	2	145,9W	Opal	21061