



SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K 4000K
Optic/Diffuser	Opal
Output	1 2 3
Finish	White RAL9003
Efficacy	Up to 135 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output DALI Casambi
Installation	Surface
Dimensions	602 x 602 1203 x 302 mm
Height	85 mm
Material	Steel
Ingress Protection	IP65
Impact Rating	IK05
Operating Voltage	220-240V 50/60Hz
Emergency Options	Standard DALI
Lifetime	100000/L80B10
Operating Temperature	-10°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	5 kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

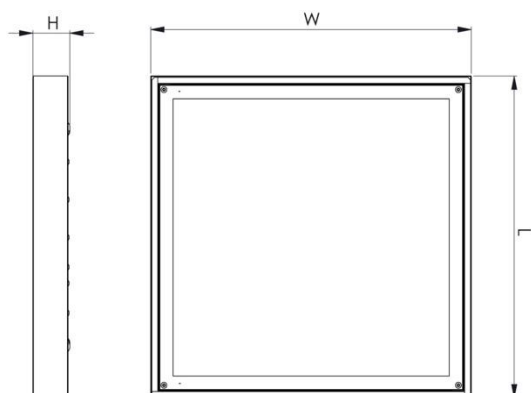

ORDER CODE

RIGEL-S-3-O-1-W-6X6

PREFIX	CCT	DIFFUSER/OPTIC	OUTPUT	FINISH	LENGTH (mm)
RIGEL-S-	3	O Opal	1	W White RAL9003	6X6
	3000K		Low		12X3
	4		2		
	4000K		Standard		
			3		
			Medium		
			4		
			High		
			5		
			Product specific		
			6		
			Product specific		
			7		
			Product specific		

OPTIONS

EM	Emergency version 3 hours
EMS	Emergency version equipped with an autonomous testing system 3 hours
EMD	Emergency version 3 hours with DALI interface
D	DALI dimming functionality
C	Casambi wireless lighting controls

STANDARD DIMENSIONS – 3000K – OPAL

DIMENSIONS (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
602x602x85mm	Direct	3000K	1	25,9W	Opal	3151
602x602x85mm	Direct	3000K	2	33W	Opal	4110
602x602x85mm	Direct	3000K	3	34,5W	Opal	4202
602x602x85mm	Direct	3000K	4	44W	Opal	5480
602x602x85mm	Direct	3000K	5	32,5W	Opal	3886
602x602x85mm	Direct	3000K	6	38,4W	Opal	4490
602x602x85mm	Direct	3000K	7	56,6W	Opal	6207
1203x302x85mm	Direct	3000K	1	34,5W	Opal	4202
1203x302x85mm	Direct	3000K	2	50,1W	Opal	5822
1203x302x85mm	Direct	3000K	3	71,4W	Opal	8733

STANDARD DIMENSIONS – 4000K – OPAL

DIMENSIONS (mm)	DISTRIBUTION	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
602x602x85mm	Direct	4000K	1	25,9W	Opal	3322
602x602x85mm	Direct	4000K	2	32,4W	Opal	4332
602x602x85mm	Direct	4000K	3	33,8W	Opal	4429
602x602x85mm	Direct	4000K	4	42,8W	Opal	5776
602x602x85mm	Direct	4000K	5	32,5W	Opal	4060
602x602x85mm	Direct	4000K	6	38,4W	Opal	4691
602x602x85mm	Direct	4000K	7	56,6W	Opal	6485
1203x302x85mm	Direct	4000K	1	33,8W	Opal	4429
1203x302x85mm	Direct	4000K	2	48,5W	Opal	6137
1203x302x85mm	Direct	4000K	3	68,2W	Opal	8780