RULER
RECESSED LINEAR

SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K | 4000K
Optic/Diffuser	MPO | translucent MPO
Output	1 | 2 | 3 | 4
Finish	White RAL9003
Efficacy	Up to 167 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output | DALI
Installation	Recessed in modular suspended ceilings. Luminaire from two parts and single gearbox can be installed into every next tile, or optionally into every forth tile.
Dimensions	L 559 x W 123 x H 72 mm (x2) L 595 x W 123 x H 72 mm L 1195 x W 123 x H 72 mm
Material	Steel
Ingress Protection	IP40/20
Impact Rating	IK02
Operating Voltage	220-240V 50/60Hz
Emergency Options	Standard | DALI
Lifetime	100000/L80B10
Operating Temperature	-0°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	1.6-2.5kg
Warranty	5 Years
Emergency	Standard 3hr | DALI 3hr
Optional (please ask)	PIR sensors | corridor function

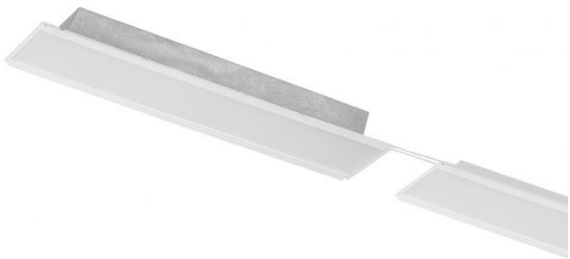

DIMENSIONS/PHOTOMETRY

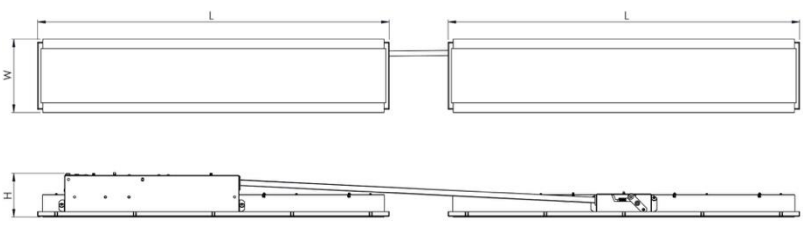



ORDER CODE

RULER-3-M-1-W-2X6

PREFIX	CCT	DIFFUSER/OPTIC	OUTPUT	FINISH	DIMENSIONS
RULER-	**3** 3000K **4** 4000K	**M** MPO **MT** Translucent MPO	**1** Low **2** Standard **3** Medium **4** High	**W** White RAL9003S	**2X6** L 559 x2 **6** L 595 **12** L 1195

OPTIONS

EM	Emergency version 3 hours
EMS	Emergency version equipped with an autonomous testing system 3 hours
EMD	Emergency version 3 hours with DALI interface
D	DALI dimming functionality

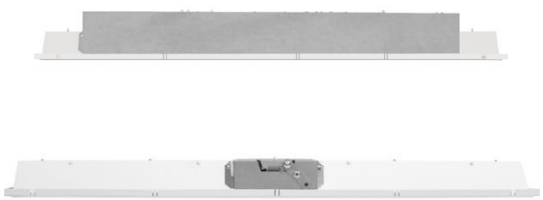

STANDARD LENGTHS – 3000K – 4000K – MPO

DIMENSIONS (mm)	LUMINIARES	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)	WEIGHT (kg)
595x123	2	3000K	1	25,9W	MPO	3782lm	2.55
595x123x72	2	3000K	2	37,6W	MPO	5240lm	2.55
595x123x72	1	3000K	1	13,8W	MPO	1891lm	1.64
595x123x72	1	3000K	2	18,8W	MPO	2620lm	1.64
1195x123x72	1	3000K	1	25,9W	MPO	3782lm	2.4
1195x123x72	1	3000K	2	37,6W	MPO	5240lm	2.4
595x123x72	2	4000K	1	25,9W	MPO	3986lm	2.55
595x123x72	2	4000K	2	37,6W	MPO	5523lm	2.55
595x123x72	1	4000K	1	13,7W	MPO	1993lm	1.64
595x123x72	1	4000K	2	18,8W	MPO	2761lm	1.64
1195x123x72	1	4000K	1	25,9W	MPO	3986lm	2.4
1195x123x72	1	4000K	2	37,6W	MPO	5523lm	2.4

STANDARD LENGTHS – 3000K – 4000K – MPO TRANSLUCENT
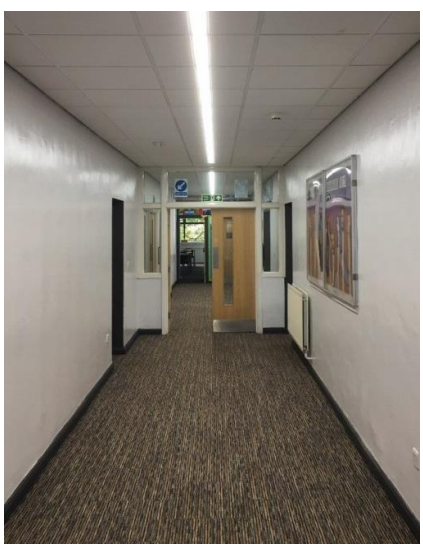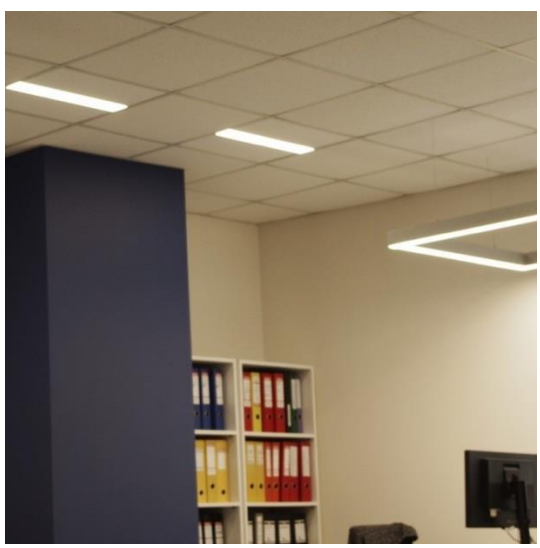
DIMENSIONS (mm)	LUMINIARES	CCT	OUTPUT	POWER	DIFFUSER/OPTIC	LUMENS (lm)	WEIGHT (kg)
595x123	2	3000K	1	25,9W	MPO translucent	4097lm	2.55
595x123x72	2	3000K	2	37,6W	MPO translucent	5677lm	2.55
595x123x72	1	3000K	1	13,8W	MPO translucent	2048lm	1.64
595x123x72	1	3000K	2	18,8W	MPO translucent	2838lm	1.64
1195x123x72	1	3000K	1	25,9W	MPO translucent	4097lm	2.4
1195x123x72	1	3000K	2	37,6W	MPO translucent	5677lm	2.4
595x123x72	2	4000K	1	25,9W	MPO translucent	4319lm	2.55
595x123x72	2	4000K	2	37,6W	MPO translucent	5983lm	2.55
595x123x72	1	4000K	1	13,7W	MPO translucent	2159lm	1.64
595x123x72	1	4000K	2	18,8W	MPO translucent	2992lm	1.64
1195x123x72	1	4000K	1	25,9W	MPO translucent	4319lm	2.4
1195x123x72	1	4000K	2	37,6W	MPO translucent	5983lm	2.4