ZEN PLUS
SURFACE DOWNLIGHT

SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K | 4000K
Optic/Diffuser	Opal
Output	1 | 2 | 3
Finish	White RAL9016
Efficacy	Up to 111 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output | DALI | Casambi
Installation	Surface | suspension kit
Dimensions	Ø200 x 130 mm
Material	Aluminium
Ingress Protection	IP44
Impact Rating	IK04
Operating Voltage	220-240V 50/60Hz
Lifetime	60000/L80B10
Operating Temperature	0°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	1kg
Warranty	5 Years

DIMENSIONS/PHOTOMETRY

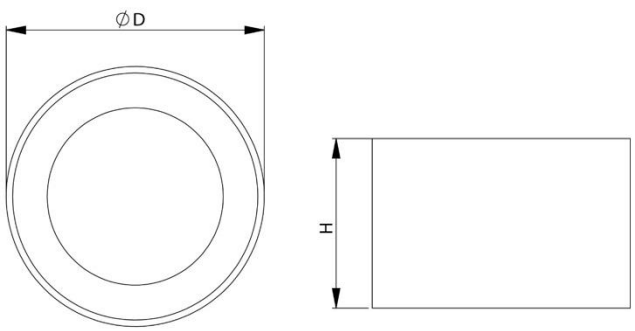



ORDER CODE

ZENP-3-40-1-W

PREFIX	CCT	DIFFUSER/OPTIC	OUTPUT	FINISH
ZENP-	**3** 3000K **4** 4000K	**O** Opal	**1** Low **2** Standard **3** Medium	**W** White RAL9016

OPTIONS

EM	Emergency version 3 hours
EMS	Emergency version equipped with an autonomous testing system 3 hours
EMD	Emergency version 3 hours with DALI interface
D	DALI dimming functionality
C	Casambi wireless lighting controls
SUS	Suspension Wire Kit 1.5m Adjustable, 1pcs

STANDARD DIAMETERS – 3000K– 4000K

DIMENSIONS (mm)	CCT	OUTPUT	POWER	OPTIC	FINISH	CONTROL	LUMENS (lm)
Ø200x130mm	3000K	1	11.8W	Opal	White RAL9016	Fixed Output	1261
Ø200x130mm	3000K	2	16W	Opal	White RAL9016	Fixed Output	1774
Ø200x130mm	3000K	3	23.1W	Opal	White RAL9016	Fixed Output	2458
Ø200x130mm	4000K	1	11.8W	Opal	White RAL9016	Fixed Output	1321
Ø200x130mm	4000K	2	16W	Opal	White RAL9016	Fixed Output	1858
Ø200x130mm	4000K	3	23.1W	Opal	White RAL9016	Fixed Output	2575