

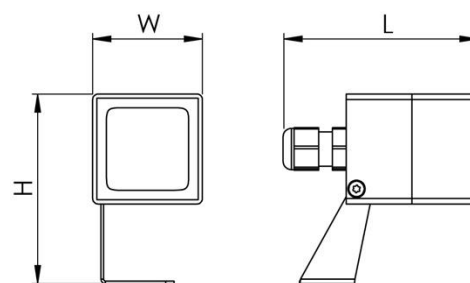
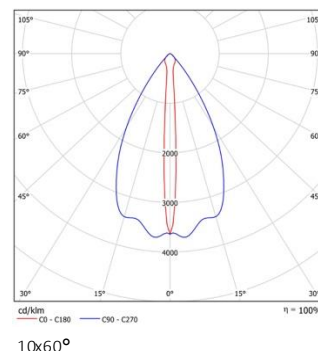
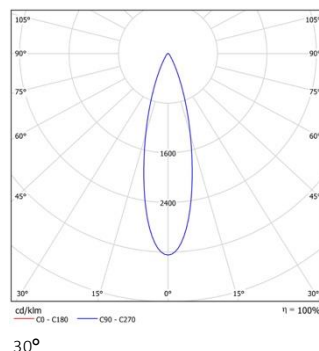


SPECIFICATION

Distribution	Direct spotlight
Colour Temperature CCT	3000K 4000K
Optic/Beam	8° 12° 30° 10x60°
Output	6W
Finish	Grey RAL9023
Efficacy	Up to 83 lm/W
CRI	80+
SDCM	5
Controls	Fixed output
Installation	Surface-mounted
Connection	Cable, 0.5m, 3x1.0mm ²
Length	65 mm
Width	40 mm
Height	69 mm
Material	Aluminium/tempered glass
Ingress Protection	IP66
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	80000/L80B50
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.3kg
Warranty	5 Years
Optional (please ask)	In-ground spike

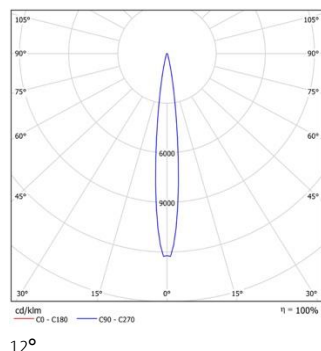

PHOTOMETRY

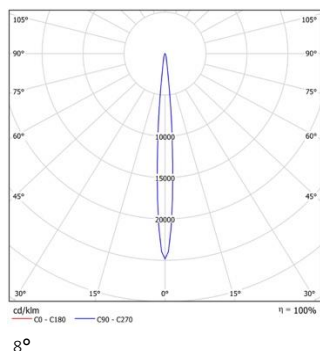

ORDER CODE

BAE-S-3-8-G

PREFIX	TYPE	CCT	OPTIC/BEAM	FINISH	OPTIONS
BAE-	S Small	3 3000K 4 4000K	8 8° narrow 12 12° small 30 30° medium 1060 10x60° elliptical beam	G Grey RAL9023	SPIKE In-ground spike

STANDARD – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	IP	IK	LUMENS (lm)
BAE-S	3000K	8°	6W	IP66	IK08	480lm
BAE-S	3000K	12°	6W	IP66	IK08	480lm
BAE-S	3000K	30°	6W	IP66	IK08	480lm
BAE-S	3000K	10x60°	6W	IP66	IK08	480lm
BAE-S	4000K	8°	6W	IP66	IK08	500lm
BAE-S	4000K	12°	6W	IP66	IK08	500lm
BAE-S	4000K	30°	6W	IP66	IK08	500lm
BAE-S	4000K	10x60°	6W	IP66	IK08	500lm

