


## SPECIFICATION


Installation	Recessed   Surface   Suspended
Viewing Distance	28m
Input Voltage	230V 50Hz
Colour Temperature CCT	4500K
Power (Maintained)	Up to 4.4W
Power (Non-Maintained)	Up to 3.1W
Duration	3 hours
Battery Type	4.8V 0.9Ah NiCd
IP Rating	IP20
Material	Extruded Aluminium
Finish	Surface: Silver Aluminium Recessed: White
Dimensions	Surface – W 300mm x H 220mm Recessed – W 355mm x H 210mm
Legend Panels	Arrow Up   Arrow Down   Arrow Left   Arrow Right
Temperature	0°C ~ 25°C
Weight	3kg
Conformity	Class I, UKCA
Warranty	5 Years



## DIMENSIONS

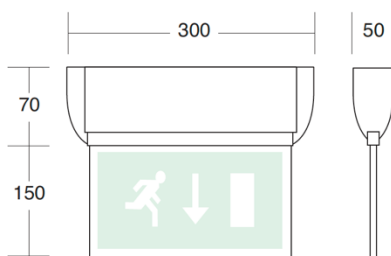

**Surface:** the surface and suspended solutions connect with fixing brackets that retain the standard luminaire body via quick release spring clips. For the suspended installation, 1m wire suspension cables are provided.

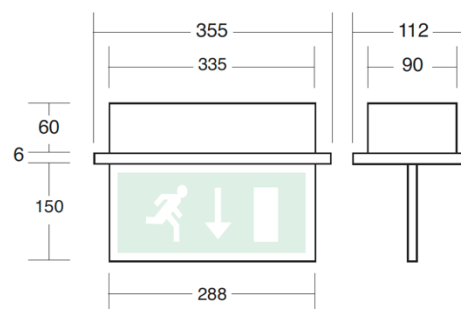

**Recessed:** the housing has adjustable spring clip arms to simplify installation into different thickness supporting surfaces.

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-EL-SIGN3-SUS-STD-SL	Suspended exit sign, silver Standard (supplied without legend panel)
EM-EL-SIGN3-SUS-DALI-SL	Suspended exit sign, silver DALI (supplied without legend panel)
EM-EL-SIGN3-SUS-STD-WH	Suspended exit sign, White Standard (supplied without legend panel)
EM-EL-SIGN3-SUS-DALI-WH	Suspended exit sign, White DALI (supplied without legend panel)
EM-EL-SIGN3-SUS-LEG-ALAR	Arrow Left/Right Legend for SIGN3
EM-EL-SIGN3-SUS-LEG-AD	Arrow Down Legend for SIGN3
EM-EL-SIGN3-SUS-LEG-AU	Arrow Up Legend for SIGN3
EM-EL-SIGN3-SUS-CEILING-BRKT	Ceiling Mounting Bracket For SIGN3
EM-EL-SIGN3-SUS-WALL-BRKT	Wall Mounting Bracket For SIGN3
EM-EL-SIGN3-SUS-END-BRKT	End (Flag) Mounting Bracket For SIGN3
EM-EL-SIGN3-SUS-WIRE-SUSP-1.0M	1.0m Wire Susp Kit For SIGN3
EM-EL-SIGN3-SUS-WIRE-SUSP-3.0M	3.0m Wire Susp Kit For SIGN3

