


SPECIFICATION

Installation	Surface
Viewing Distance	25m
LED	Samsung LEDs
Input Voltage	230-240V 50Hz
Power (Maintained)	5.7W 34mA
Power (Non-Maintained)	5.4W 30mA
Duration	3 hours
Battery Type	3.2V 3.8Ah LiFePO4 Cells
Recharge Period	24 hours
Charge Current	225mA nominal
IP Rating	IP20
Material	White Polycarbonate Module
Finish	Surface – Silver Aluminium Recessed – White
Dimensions	W 297 mm x H 222 mm x D 52 mm
Legend Panels	Arrow Up Arrow Down Arrow Left/Right
Temperature	-25°C ~ 55°C
Weight	0.82kg
Conformity	UKCA, DDP
Warranty	5 Years



DIMENSIONS

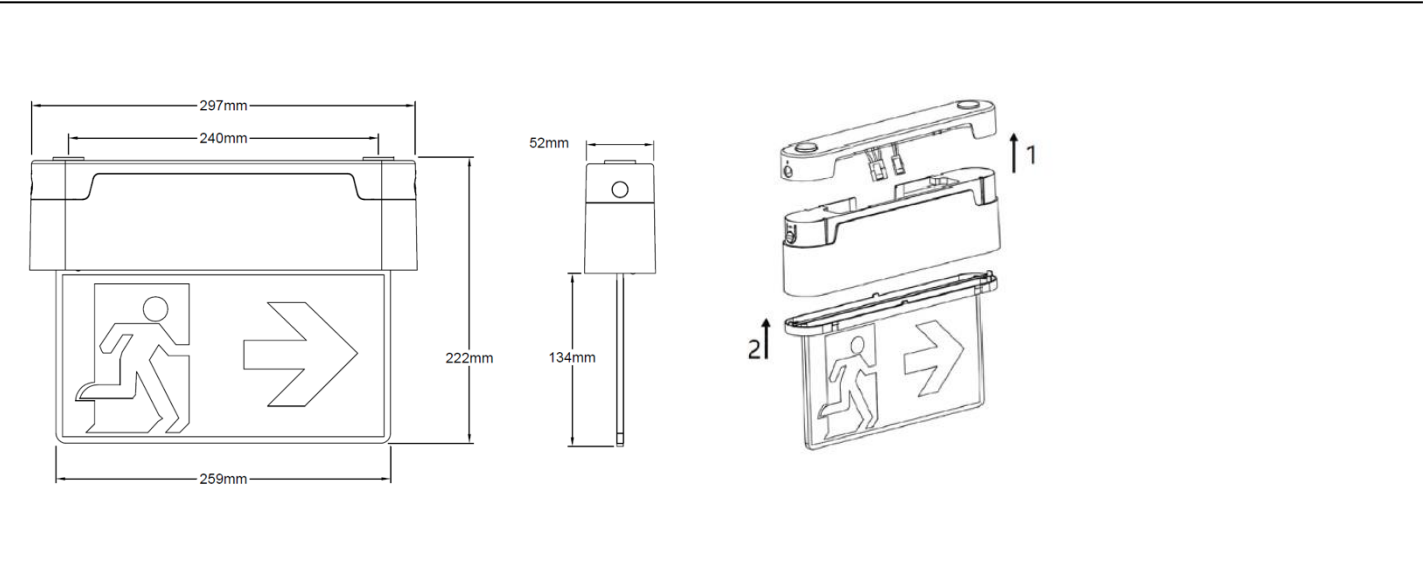

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-LP-SIGN4-SURF-STD-AU	Surface exit sign, White, Standard, Arrow Up
EM-LP-SIGN4-SURF-STD-AD	Surface exit sign, White, Standard, Arrow Down
EM-LP-SIGN4-SURF-STD-ALR	Surface exit sign, White, Standard, Arrow Left/Right
EM-LP-SIGN4-SURF-DALI-AU	Surface exit sign, White, DALI, Arrow Up
EM-LP-SIGN4-SURF-DALI-AD	Surface exit sign, White, DALI, Arrow Down
EM-LP-SIGN4-SURF-DALI-ALR	Surface exit sign, White, DALI, Arrow Left/Right
EM-LP-SIGN5-REC-STD-AU	Recessed exit sign, Standard, Arrow Up

