


SPECIFICATION

Input Voltage	230 – 240V AC 50/60 Hz
Recharge period	12 hours
Duration	3 hours
Viewing Distance	25m
IP Rating	IP41
Material	White polycarbonate body
Panel Dimensions	L 250 mm x H 125 mm x W 6 mm
Recessed Module Dimensions	L 300 mm x H 70 mm x W 42 mm
Legend Arrows	Arrow up, arrow down and arrow left/right
Conformity	BS 61000-3-3:2013+A2:2021, BS 61347-1:2015+A1:2021, BS EN IEC 62031:2020+A11:2021, UKCA
Warranty	5 Years
Switchable Maintained	
Power	2W 44mA $\lambda = 0.6$
Battery Type	6.4V 1.6Ah LiFePO4 Cells
Charge Current	0-400mA Dual Rate
Weight	1.00 Kg
DALI Self-test Maintained	
Max Case Temperature	65 °C
Power	2W 40mA - $\lambda = 0.6$
Battery Type	3.2V 4.5Ah LiFePO4 Cells
Charge Current	0-150mA Dual Rate
Weight	1.10 Kg



DIMENSIONS

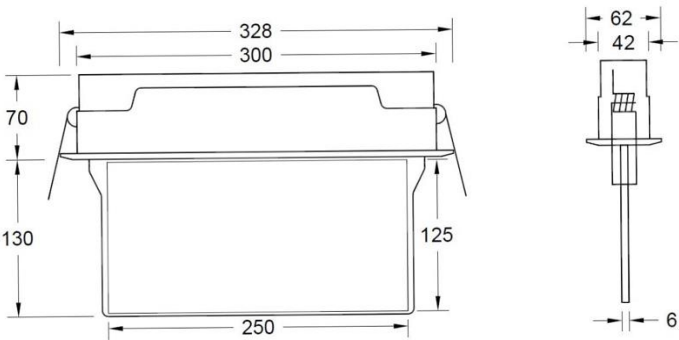

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-LP-SIGN5-REC-STD-AD	Exit Sign Recessed, Stand, Arrow Down
EM-LP-SIGN5-REC-STD-ALR	Exit Sign Recessed, Stand, Arrow Left/Right
EM-LP-SIGN5-REC-DALI-AU	Exit Sign Recessed, DALI, Arrow Up
EM-LP-SIGN5-REC-DALI-AD	Exit Sign Recessed, DALI, Arrow Down
EM-LP-SIGN5-REC-DALI-ALR	Exit Sign Recessed, DALI, Arrow Left/Right

