


SPECIFICATION

Emergency Options	Standard   DALI Self-test
Luminous Flux	209 Lumens
Mains Supply	230 – 240V AC 50/60 Hz
Power Rating Charging Standard*	2W 25mA $\lambda = 0.35$
Power Rating Charged Standard*	0.45W 7.5mA $\lambda = 0.24$
Power Rating Charging DALI*	2.2W 18mA $\lambda = 0.48$
Power Rating Charged DALI*	0.4W 8.5mA $\lambda = 0.16$
Module Dimensions	L 330mm x H 50mm x W 85mm
Finish	Black RAL 9005   White RAL 9016
Battery Type	3.2V 3.8Ah LiFePO4
Weight (with LED)	1.4Kg
Ambient Temperature	0°C ~ 25°C
Conformity	DALI 2 certified device registered with DiiA, UKCA
Ingress Protection	IP20
Warranty	5 Years
Track Suitability	Eutrac, Global Track or Stucchi 3-circuit Track (non-DALI)



**Note\*** After its initial charge, It will spend 90% of its operational life in standby mode.

DIMENSIONS

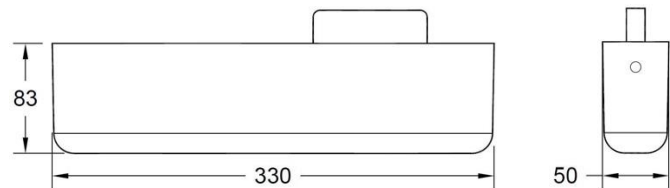

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-LP-TRACK-STD-WH	Non-Maintained Standard emergency Track Module White
EM-LP-TRACK-DALI-WH	Non-Maintained DALI emergency Track Module White
EM-LP-TRACK-ST-WH	Non-Maintained S-Test emergency Track Module White
EM-LP-TRACK-STD-BL	Non-Maintained Standard emergency Track Module Black
EM-LP-TRACK-DALI-BL	Non-Maintained DALI emergency Track Module Black
EM-LP-TRACK-ST-BL	Non-Maintained S-Test emergency Track Module Black