


SPECIFICATION

Distribution	Direct (up or down) Direct/indirect
Colour Temperature CCT	3000K 4000K
Optic/Beam	Reflector 36° Lens 15° Reflector 60° 90° *ceiling only
Output	4.5W - 27W
Finish	Grey RAL7043
Efficacy	Up to 94 lm/W
CRI	80+
SDCM	5
Controls	Fixed output
Installation	Wall Ceiling/Surface-mounted
Connection	Wall. Screw terminal, 3x1x1.5 mm ² Ceiling/surface. Cable, 0.15m, 3x1.0mm ²
Dimensions – Dir & Dir/Ind	86-118 x H 180-220 mm
Dimensions – Ceiling/Surface	86-150 x H 115-120 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-24°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.8-1.2kg
Warranty	5 Years



DIMENSIONS

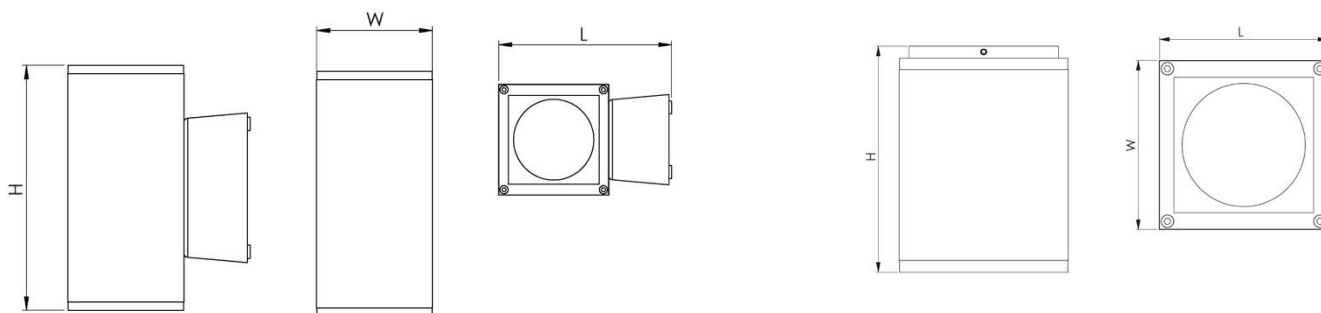

ORDER CODE

FORM-D-3-30-1-G

PREFIX	DISTRIBUTION	CCT	OPTIC/BEAM	OUTPUT	FINISH
FORM-	D Direct	3 3000K	15 15° reflector	1 Low	G Grey RAL7043
	DI Direct/indirect	4 4000K	36 36° lens	2 Standard	

ORDER CODE


FORM-SUR-3-60-1-G

PREFIX	DISTRIBUTION	CCT	OPTIC/BEAM	OUTPUT	FINISH
FORM-	SUR Ceiling/surface	3 3000K	60 60° reflector	1 Low	G Grey RAL7043
		4 4000K	90 90° reflector	2 Standard	
				3 Standard	




STANDARD – DIR – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	DIMENSIONS	LUMENS (lm)	ORDER CODE
FORM	3000K	36° Reflector	12.5W	130x86x180mm	653lm	FORM-D-3-36-1-G
FORM	3000K	36° Reflector	27W	170x118x220mm	1000lm	FORM-D-3-36-2-G
FORM	4000K	36° Reflector	12.5W	130x86x180mm	680lm	FORM-D-4-36-1-G
FORM	4000K	36° Reflector	27W	170x118x220mm	1064lm	FORM-D-4-36-2-G
FORM	3000K	15° Lens	4.5W	130x86x135mm	370lm	FORM-D-3-15-1-G
FORM	3000K	15° Lens	8.5W	170x118x165mm	768lm	FORM-D-3-15-2-G
FORM	4000K	15° Lens	4.5W	130x86x135mm	386lm	FORM-D-4-15-1-G
FORM	4000K	15° Lens	8.5W	170x118x165mm	800lm	FORM-D-4-15-2-G

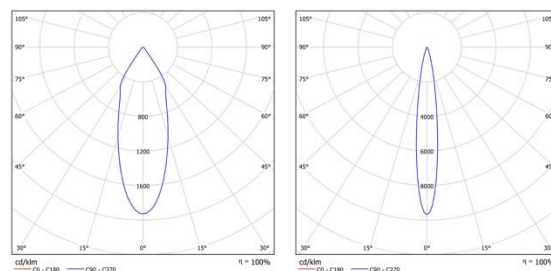

STANDARD – DIR/IND – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	DIMENSIONS	LUMENS (lm)	ORDER CODE
FORM	3000K	2 X 36° Reflector	12.5W	130x86x180mm	960lm	FORM-DI-3-36-1-G
FORM	3000K	2 X 36° Reflector	27W	170x118x220mm	2349lm	FORM-DI-3-36-2-G
FORM	4000K	2 X 36° Reflector	12.5W	130x86x180mm	1000lm	FORM-DI-3-36-1-G
FORM	4000K	2 X 36° Reflector	27W	170x118x220mm	2447lm	FORM-DI-3-36-2-G
FORM	3000K	2 X 15° Lens	8.5W	130x86x135mm	738lm	FORM-DI-3-15-1-G
FORM	3000K	2 X 15° Lens	17W	170x118x165mm	1430lm	FORM-DI-3-15-2-G
FORM	4000K	2 X 15° Lens	8.5W	130x86x135mm	769lm	FORM-DI-4-15-1-G
FORM	4000K	2 X 15° Lens	17W	170x118x165mm	1490lm	FORM-DI-4-15-2-G

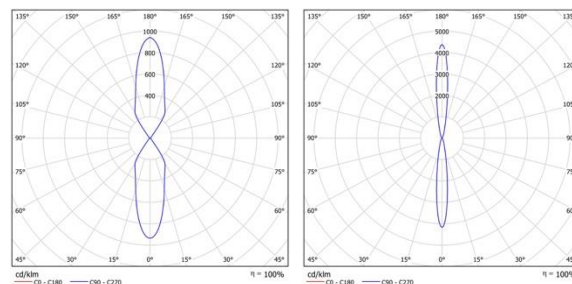

STANDARD – CEILING/SURFACE – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	DIMENSIONS	LUMENS (lm)	ORDER CODE
FORM	3000K	60° Reflector	6.5W	86x86x115mm	499lm	FORM-SUR-3-60-1-G
FORM	3000K	60° Reflector	8.5W	118x118x120mm	653lm	FORM-SUR-3-60-2-G
FORM	3000K	90° Reflector	12.5W	150x150x120mm	1045lm	FORM-SUR-3-90-3-G
FORM	4000K	60° Reflector	6.5W	86x86x115mm	520lm	FORM-SUR-4-60-1-G
FORM	4000K	90° Reflector	8.5W	118x118x120mm	680lm	FORM-SUR-4-60-2-G
FORM	4000K	60° Reflector	12.5W	150x150x120mm	1089lm	FORM-SUR-4-90-3-G

