


SPECIFICATION

Type	LED street luminaire	
Distribution	Direct	
Beam Angle	Standard & asymmetric options available	
Optic/Diffuser	Lenses, tempered glass diffuser	
Power	12.5W – 175W	
Colour Temperature CCT	3000K 4000K	
Efficacy	Up to 156lm	
CRI	70+	
Finish	Light grey RAL7035 black optional	
SDCM	3	
Controls	Fixed output DALI	
Installation – Pole Ø60mm	Horizontal	Vertical
Adjustable	Tilt +/- 15 degrees	Tilt +/- 15 degrees
Installation – Wall	On the wall (mounting bracket ordered separately)	
Connection	Screw terminal, 3x1x1.5mm ²	
Dimensions	L 525 x W 205 x H 102 mm	
Material	Aluminium/glass	
Ingress Protection	IP66	
Impact Rating	IK08	
Operating Voltage	220-240V, 50-60Hz	
Lifetime	100000/L90B10	
Operating Temperature	-25°C ~40°C	
Conformity	UKCA, CE, RoHS, IEC:I	
Weight	3.5-9.4kg	
Optional	Photocell PCA switch II protection class	
Warranty	5 Years	



DIMENSIONS

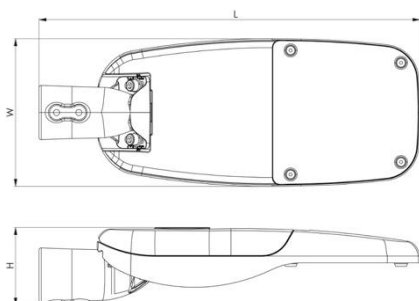

LSM1 universal asymmetric beam

