



SPECIFICATION

Type	LED Bollard
Distribution	Omni-directional
Optic/Diffuser	Clear polycarbonate diffuser
Colour Temperature CCT	3000K 4000K
Output	14.3W
Finish	Grey RAL7043
Efficacy	Up to 114 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output DALI
Installation	Surface/ground
Dimensions	L 165 x W 165 x H 805 mm
Material	Aluminium/polycarbonate
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	3K - 220-240V, 0/50-60Hz 4K - 220-240V, 50-60Hz
Connection	Screw terminal, 3x1x1.5mm ²
Lifetime	50000/L80B10
Operating Temperature	-30°C ~35°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	3.5kg
Warranty	5 Years
Optional (please ask)	LED driver with doubled input terminals for looping the mains cables

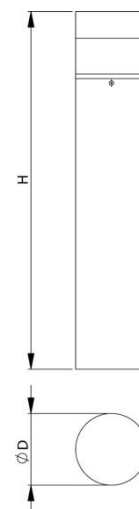

ORDER CODE

ORDER CODE	DIMENSIONS (mm)	CCT	OUTPUT	DIFFUSER/OPTIC	LUMENS (lm)
KAM-3-C-14.3W	H 805 mm	3000K	14.3W	Clear	1542
KAM-4-C-14.3W	H 805 mm	4000K	14.3W	Clear	1627

OPTIONS

KAM-ACC-LOOP	Driver with doubled input terminals for looping the mains cables
KAM-ACC-INGROUND	Kit for mounting the luminaire to the ground