



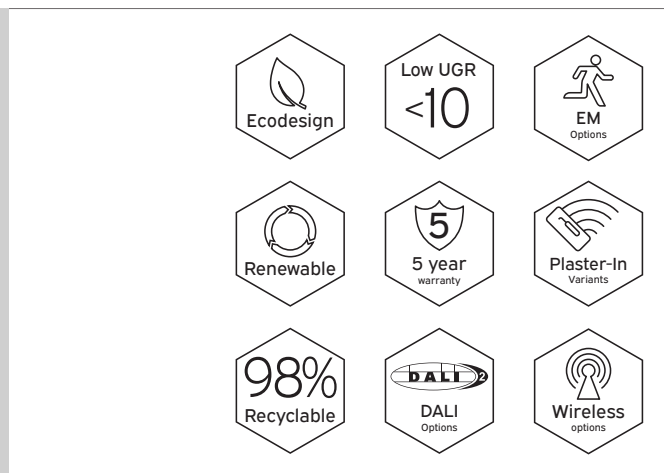

KEY FEATURES

- Low glare architectural downlight powered by Tridonic
- Discreet minimal bezel, die-cast from pure aluminium
- White bezel - RAL 9003
- Matt black darklight baffle - RAL 9005 - developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflector
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsink
- Short circuit, overload and temperature protection

DIMENSIONS

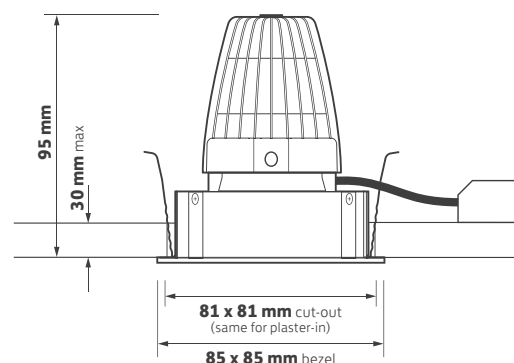

ORDERING INFORMATION

Engine output (lm)	Luminaire power (tcW)	Colour temp	Model ref.
625	8.0	927	KIERA2-8-27-W
650	6.5	830	KIERA2-6-3-W
700	6.5	840	KIERA2-6-4-W
850	10.0	927	KIERA2-10-27-W
850	7.5	830	KIERA2-7-3-W
900	7.5	840	KIERA2-7-4-W
1150	13.5	927	KIERA2-13-27-W
1250	11.5	830	KIERA2-11-3-W
1325	11.5	840	KIERA2-11-4-W

OPTIONS


Options	Suffix
Narrow beam reflector	/NB
Control gear	/ECO, /MDIM, /BTC
Emergency - Remote indicator	/EM, /EMD
Emergency - Integral indicator	/EMI, /EMDI
Plaster in bezel	/PL
Black bezel	/B
White softlight baffle	/WSB
Ra90 high colour rendering	/9



KEY FEATURES

- Low glare architectural downlight powered by Tridonic
- Discreet minimal bezel, die-cast from pure aluminium
- White bezel - RAL 9003
- Matt black darklight baffles - RAL 9005 - developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflectors
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsinks
- Short circuit, overload and temperature protection

DIMENSIONS

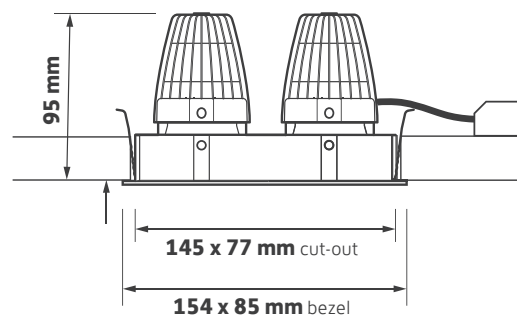


ORDERING INFORMATION

Engine output (lm)	Luminaire power (tcW)	Colour temp	Model ref.
1225	16.0	927	KIERA2-16-27-W-TWIN
1300	13.0	830	KIERA2-13-3-W-TWIN
1375	13.0	840	KIERA2-13-4-W-TWIN
1675	20.0	927	KIERA2-20-27-W-TWIN
1700	15.5	830	KIERA2-15-3-W-TWIN
1800	15.5	840	KIERA2-15-4-W-TWIN
2275	27.0	927	KIERA2-27-27-W-TWIN
2475	23.0	830	KIERA2-23-3-W-TWIN
2625	23.0	840	KIERA2-23-4-W-TWIN

OPTIONS


Options	Suffix
Narrow beam reflectors	/NB
Control gear	/ECO, /MDIM, /BTC
Emergency - Remote indicator	/EM, /EMD
Emergency - Integral indicator	/EMI, /EMDI
White softlight baffles	/WSB
Ra90 high colour rendering	/9

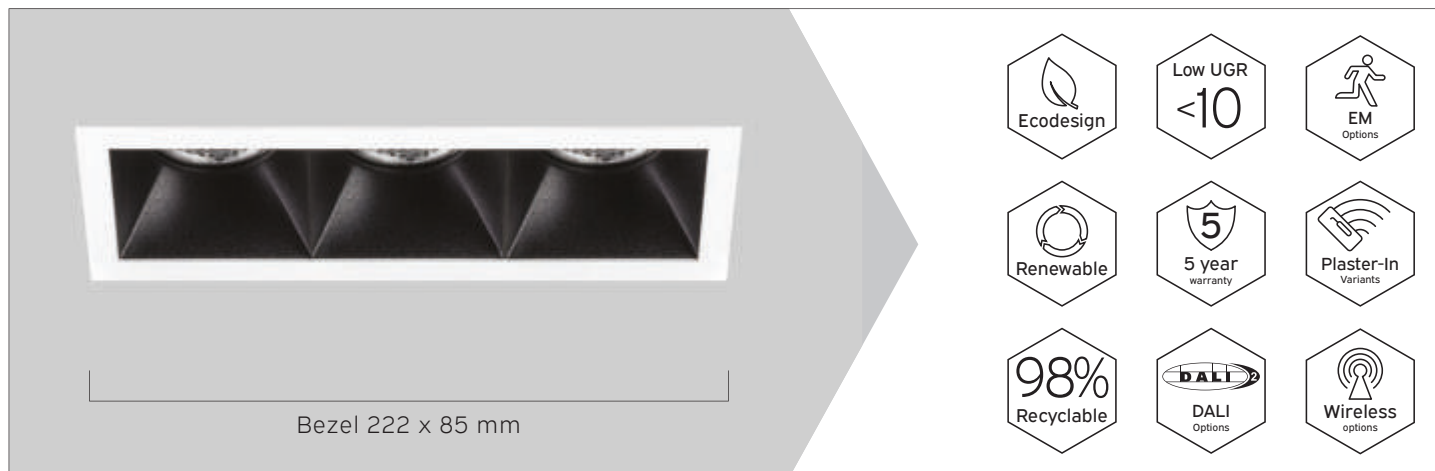

KEY FEATURES

- Low glare architectural downlight powered by Tridonic
- Discreet minimal bezel, die-cast from pure aluminium
- White bezel - RAL 9003
- Matt black darklight baffles - RAL 9005 - developed to minimise glare
- Fitted with integral IP44 protective lenses as standard
- Precision moulded 40° reflectors
- Tridonic LED engine and driver system
- Excellent thermally optimised 24 super-fin die-cast heatsinks
- Short circuit, overload and temperature protection

DIMENSIONS

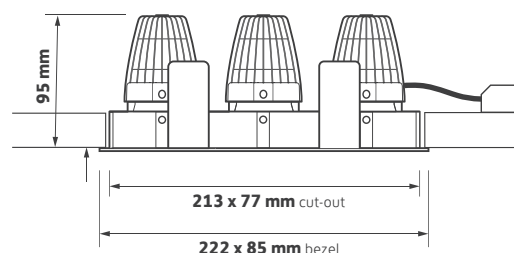

ORDERING INFORMATION


Engine output (lm)	Luminaire power (tcW)	Colour temp	Model ref.
1825	24.0	927	KIERA2-24-27-W-TRIPLE
1925	19.0	830	KIERA2-19-3-W-TRIPLE
2050	19.0	840	KIERA2-19-4-W-TRIPLE
2500	29.5	927	KIERA2-30-27-W-TRIPLE
2550	23.0	830	KIERA2-24-3-W-TRIPLE
2700	23.0	840	KIERA2-24-4-W-TRIPLE
3400	40.0	927	KIERA2-40-27-W-TRIPLE
3725	34.0	830	KIERA2-34-3-W-TRIPLE
3950	34.0	840	KIERA2-34-4-W-TRIPLE

OPTIONS


Options	Suffix
Narrow beam reflector	/NB
Control gear	/ECO, /MDIM, /BTC
Emergency - Remote indicator	/EM, /EMD
Emergency - Integral indicator	/EMI, /EMDI
White softlight baffles	/WSB
Ra90 high colour rendering	/9




/NB
20° narrow beam
reflector



/ECO
SwitchDIM, DALI & DSI



/MDIM
Mains dimming



/BTC
Casambi wireless net-
work inc. dimming



/EM
Emergency
Remote indicator



/EMD
DALI / Self test EM
Remote indicator



/EMI
Emergency
Integral indicator



/EMDI
DALI / Self test EM
Integral indicator



/R9
High colour rendering
LED module



/PL
Plaster-in bezel



/B
Black bezel
RAL 9005



/W
White softlight baffle
RAL 9003