



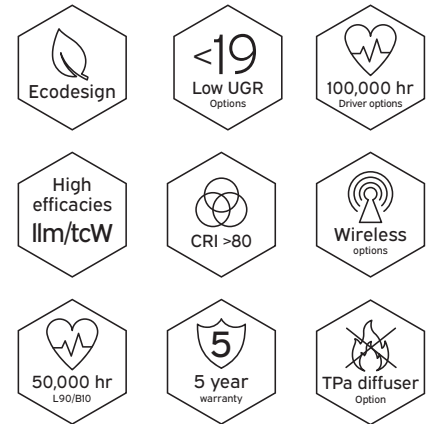

KEY FEATURES

- 600 x 600 edge lit panel powered by Tridonic
- Colour rendering >Ra80 for office applications
- UGR <19 low glare versions for LG7 compliance
- High efficiencies of up to 119 lm/tcW
- Long life of >50,000 hours L70/F10
- 100,000 hour driver options
- Self-extinguishing TP(a) diffuser option
- Wireless, DALI and emergency versions
- 5 year warranty

DIMENSIONS

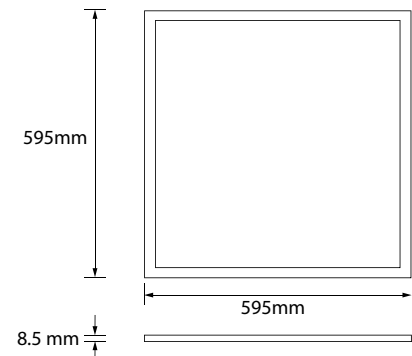


ORDERING INFORMATION

Luminaire output (lm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
2700	830	26.5	113.2	100.7	MEYER-26-3-W
3100	840	26.0	134.0	119.2	MEYER-26-4-W
3600	830	36.5	108.7	98.2	MEYER-36-3-W
3900	840	34.5	124.6	112.6	MEYER-34-4-W


OPTIONS

Options	Suffix
Diffuser	/TPA
Control gear	/ECO, /TOP, /BTC
Emergency	/EM, /EMD, /ECO/EMD
Surface mounting kit	SM
Suspension kit	SUS
Plasterboard mounting kit	PL



/TPA

Self-extinguishing
TP(a) diffuser



/ECO

SwitchDIM, DALI or DSI
dimming - 100,000hrs



/TOP

Tridonic Excite driver
100,000hrs



/BTC

Casambi Bluetooth
wireless network inc. dim



/EM

3hr emergency



/EMD

3hr DALI emergency



/ECO/EMD

DALI dimming driver
& separate
3hr DALI EM pack



SM

Surface mounting kit



PL

Plasterboard
mounting kit



SUS

Wire suspension
kit



BTWS001

Wireless Casambi
single wall switch



BTWS002

Wireless Casambi
twin wall switch