
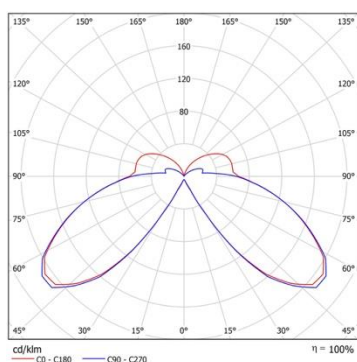


## SPECIFICATION

|                        |                                                                         |
|------------------------|-------------------------------------------------------------------------|
| Type                   | LED Bollard                                                             |
| Distribution           | Omni-directional                                                        |
| Optic/Diffuser         | White thermoplastic reflector                                           |
| Colour Temperature CCT | 3000K   4000K                                                           |
| Output                 | 14W                                                                     |
| Finish                 | Grey RAL7043                                                            |
| Efficacy               | Up to 86 lm/W                                                           |
| CRI                    | 80+                                                                     |
| MacAdam Ellipse        | 3                                                                       |
| Controls               | Fixed output   DALI                                                     |
| Installation           | Surface/ground                                                          |
| Dimensions             | L 150 x W 150 x H 800 mm                                                |
| Material               | Aluminium/polycarbonate                                                 |
| Ingress Protection     | IP65                                                                    |
| Impact Rating          | IK08                                                                    |
| Operating Voltage      | 220-240V, 50-60Hz                                                       |
| Connection             | Screw terminal, 3x1x1.5mm <sup>2</sup>                                  |
| Lifetime               | 50000/L80B50                                                            |
| Operating Temperature  | -20°C ~35°C                                                             |
| Conformity             | UKCA, CE, RoHS, IEC:I                                                   |
| Weight                 | 3.9kg                                                                   |
| Warranty               | 5 Years                                                                 |
| Optional (please ask)  | Thermal block with doubled input terminals for looping the mains cables |

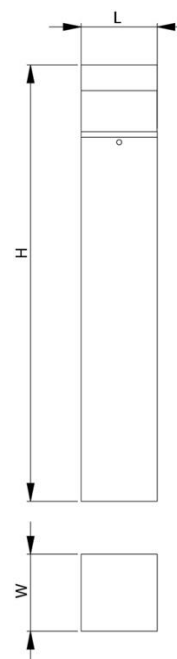

## ORDER CODE

| ORDER CODE  | DIMENSIONS (mm) | CCT   | OUTPUT | DIFFUSER/OPTIC | LUMENS (lm) |
|-------------|-----------------|-------|--------|----------------|-------------|
| MYN-3-C-14W | H 800 mm        | 3000K | 14W    | Clear          | 1059        |
| MYN-4-C-14W | H 800 mm        | 4000K | 14W    | Clear          | 1197        |

## OPTIONS

|                  |                                                                  |
|------------------|------------------------------------------------------------------|
| MYN-ACC-LOOP     | Driver with doubled input terminals for looping the mains cables |
| MYN-ACC-INGROUND | Kit for mounting the luminaire to the ground                     |