



SPECIFICATION

Distribution	Direct/floor-wash
Colour Temperature CCT	3000K 4000K
Optic/Diffuser	Opal PC diffuser asymmetrical
Output	2.5W
Finish	Grey RAL7043
Efficacy	22 lm/W
CRI	80+
SDCM	3
Controls	Fixed output
Installation	Wall-mounted/recessed
Connection	Into the wall. Cable, 0.15m, 3x1.0mm ²
Length	85 mm
Width	85 mm
Height	59 mm
Cut Out	80 x 80 x 56 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-30°C ~45°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.18kg
Warranty	5 Years

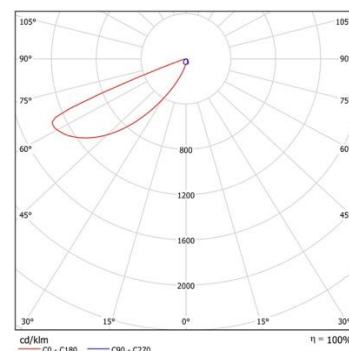

DIMENSIONS/PHOTOMETRY

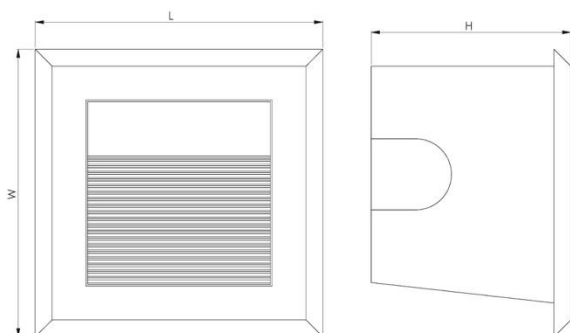

ORDER CODE

NYSA-A-3-G

PREFIX	CCT	FINISH
NYSA-A-	3 3000K 4 4000K	G Grey RAL7043

STANDARD – 3000K – 4000K

TYPE	CCT	POWER	IP	IK	LUMENS (lm)
NYSA-A	3000K	2.5W	IP65	IK08	54lm
NYSA-A	4000K	2.5W	IP65	IK08	57lm

