
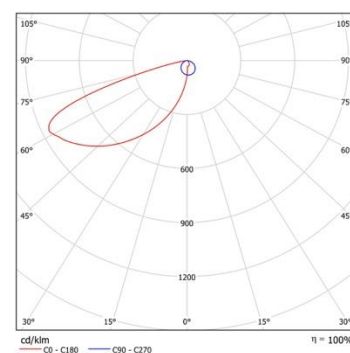



SPECIFICATION

Distribution	Direct/floor-wash
Colour Temperature CCT	3000K 4000K
Optic/Diffuser	Opal PC diffuser asymmetrical
Output	6.5W
Finish	Grey RAL7043
Efficacy	26 lm/W
CRI	80+
SDCM	3
Controls	Fixed output
Installation	Wall-mounted/recessed
Connection	Into the wall. Cable, 0.15m, 3x1.0mm ²
Length	170 mm
Width	90 mm
Height	71 mm
Cut Out	162 x 87 x 71 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-30°C ~45°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.7kg
Warranty	5 Years

DIMENSIONS/PHOTOMETRY

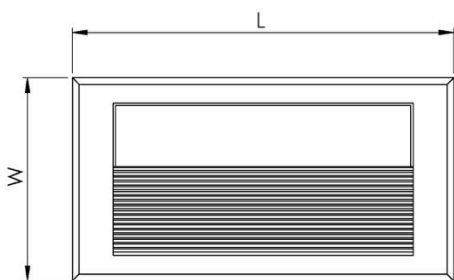

ORDER CODE

NYSA-B-3-G

PREFIX	CCT	FINISH
NYSA-B-	3 3000K 4 4000K	G Grey RAL7043

STANDARD – 3000K – 4000K

TYPE	CCT	POWER	IP	IK	LUMENS (lm)
NYSA-B	3000K	6.5W	IP65	IK08	160lm
NYSA-B	4000K	6.5W	IP65	IK08	167lm

