



SPECIFICATION

Distribution	Direct
Colour Temperature CCT	3000K 4000K
Optic	Frosted tempered glass (optional grid)
Output	3.6W
Finish	Grey RAL7043
Efficacy	64 lm/W
CRI	80+
SDCM	3
Controls	Fixed output
Installation	Wall-mounted/recessed
Connection	Into the wall. Push-in terminal, 3x2x2.5 mm ²
Length	255 mm
Width	70 mm
Height	95 mm
Material	Aluminium/tempered glass
Ingress Protection	IP54
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	1.2kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

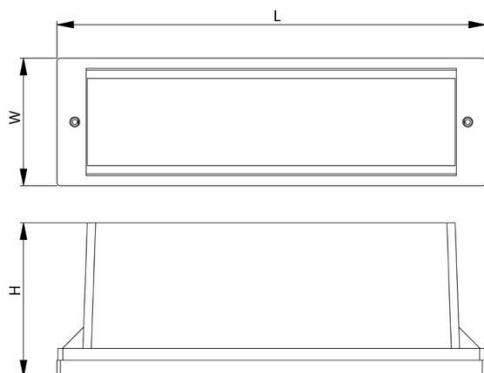

ORDER CODE

ORIN-3-FR-G

PREFIX	CCT	OPTIC	FINISH
ORIN-	3	FR	G
	3000K	Frosted glass	Grey RAL7043
	4	GRID	
	4000K	Grid	

STANDARD – 3000K – 4000K

TYPE	CCT	OPTIC	POWER	IP	IK	LUMENS (lm)
ORIN	3000K	Frosted glass	3.6W	IP54	IK08	222lm
ORIN	4000K	Frosted glass	3.6W	IP54	IK08	232lm
ORIN	3000K	Grid	3.6W	IP54	IK08	111lm
ORIN	4000K	Grid	3.6W	IP54	IK08	116lm