
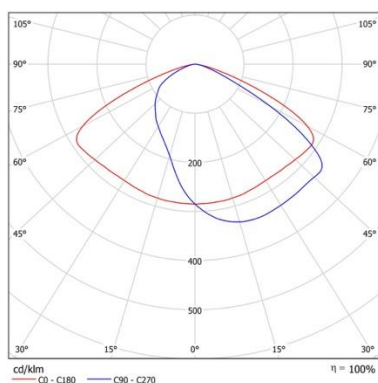


SPECIFICATION

Type	LED Bollard
Distribution	LSS2 asymmetric (other options available)
Optic	Lenses, tempered glass diffuser
Colour Temperature CCT	4000K
Output	10W
Finish	Grey RAL7043
Efficacy	Up to 126 lm/W
CRI	80+
MacAdam Ellipse	3
Controls	Fixed output DALI
Installation	Surface/ground
Dimensions	L 237 x W 150 x H 1000 mm
Material	Aluminium/polycarbonate
Ingress Protection	IP66
Impact Rating	IK08
Operating Voltage	220-240V, 0/50-60Hz
Connection	Screw terminal, 3x1x2.5mm ²
Lifetime	100000/L90B10
Operating Temperature	-20°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	6kg
Warranty	5 Years

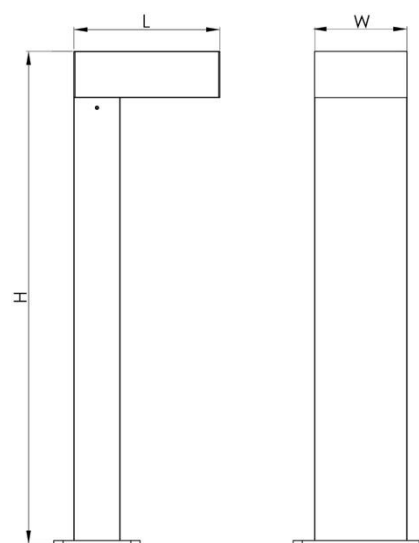

ORDER CODE

OZY-B-4-LSS2-10W-1M

PREFX	CCT	OPTIC/BEAM	OUTPUT	HEIGHT
OZY-B-	4 4000K	LSS2 Asymmetric	10W Standard	1M 1000mm