
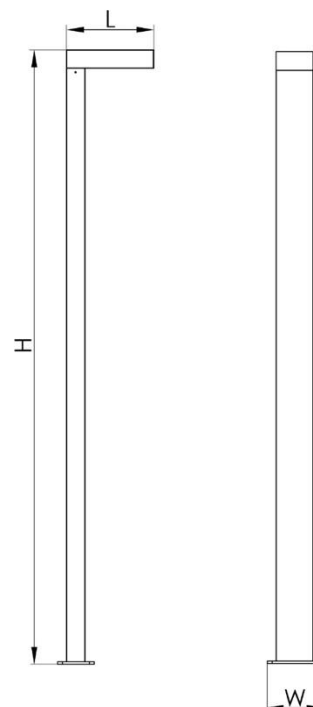
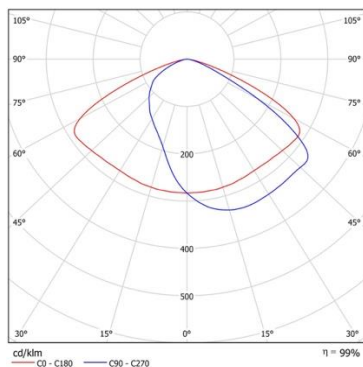


SPECIFICATION

Type	LED street luminaire
Distribution	Direct
Beam Angle	LSS2 asymmetric (other options available)
Optic/Diffuser	Lense, tempered glass diffuser
Power	27.5W
Colour Temperature CCT	4000K
Luminaire Lumens	4026lm
Efficacy	146lm/W
CRI	70+
Finish	Dark grey RAL7043
SDCM	5
Controls	Fixed output
Installation	On the ground (flange mounting plate)
Connection	Screw terminal, 3x1x2,5mm2
Dimensions	L 335 x W 150 mm
Height Options	3000 mm 4000 mm 5000 mm
Material	Aluminium/glass
Ingress Protection	IP66
Impact Rating	IK08
Operating Voltage	220-240V, 0-50-60Hz
Lifetime	100000/L90B10
Operating Temperature	-20°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	3.8kg (per luminaire head)
Warranty	5 Years

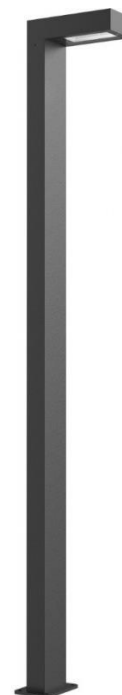

ORDER CODE

OZY-L-4-LSS2-27.5W-3M

PREFX	CCT	OPTIC/BEAM	OUTPUT	HEIGHT
OZY-L-	4 4000K	LSS2 Asymmetric	27.5W Standard	3M 3000mm
				4M 4000mm
				5M 5000mm

OPTIONS

OZA-L-ACC-T750	Colour temperature 5000K, CRI 70+
OZA-L-ACC-ADIM	Driver with autonomous two-level dimming