
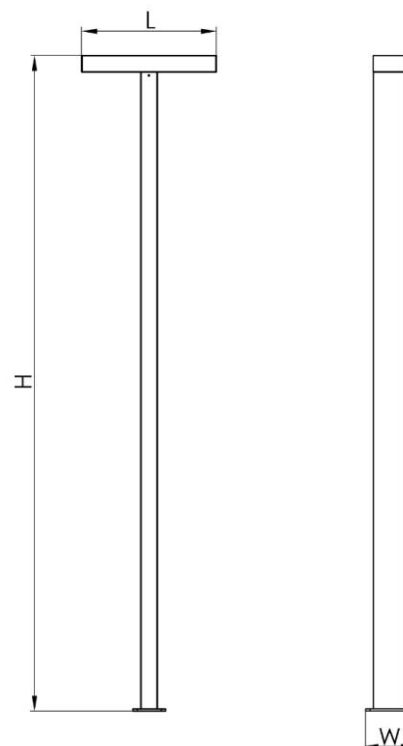
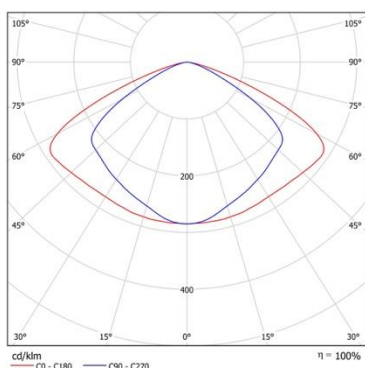


SPECIFICATION

Type	Twin LED street luminaire
Distribution	Direct
Beam Angle	LSS2 asymmetric (other options available)
Optic/Diffuser	Lenses, tempered glass diffuser
Power	53W
Colour Temperature CCT	4000K
Luminaire Lumens	8063lm
Efficacy	152lm/W
CRI	70+
Finish	Dark grey RAL7043
SDCM	5
Controls	Fixed output
Installation	On the ground (flange mounting plate)
Connection	Screw terminal, 3x1x2,5mm2
Dimensions	L 630 x W 150 mm
Height Options	3000 mm 4000 mm 5000 mm
Material	Aluminium
Ingress Protection	IP66
Impact Rating	IK08
Operating Voltage	220-240V, 0-50-60Hz
Lifetime	100000/L90B10
Operating Temperature	-20°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	3.8kg (per luminaire head)
Warranty	5 Years

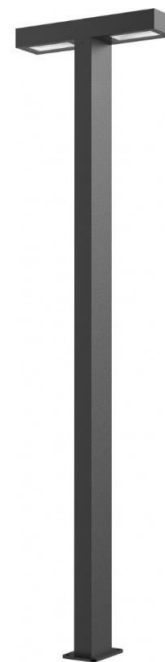

ORDER CODE

OZY-T-4-LSS2-27W-3M

PREFX	CCT	OPTIC/BEAM	OUTPUT	HEIGHT
OZY-T-	4 4000K	LSS2 Asymmetric	27W Standard	3M 3000mm 4M 4000mm 5M 5000mm

OPTIONS

OZA-T-ACC-T750	OZA - T Colour temperature 5000K, CRI 70+
OZA-T-ACC-ADIM	OZA - T Driver with autonomous two-level dimming