



SPECIFICATION

Distribution	Direct accent light
Colour Temperature CCT	3000K 4000K
Optic	Tempered glass
Output	4.2W
Finish	Grey RAL7043
Efficacy	95 lm/W
CRI	80+
SDCM	5
Controls	Fixed output
Installation	Wall-mounted
Connection	Screw terminal, 3x2.5 mm ²
Dimensions - Short	L 150 x W 101 x H 210 mm
Dimensions - Long	L 150 x W 101 x H 605 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	15000/L70B50
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	4.2kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

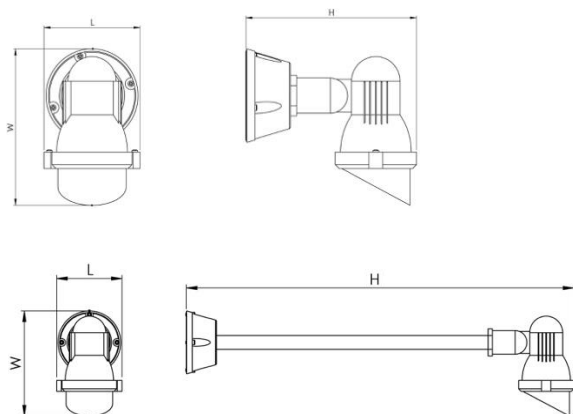

ORDER CODE

REI-S-3

PREFIX	TYPE	CCT
REI-	S	3
	Short	3000K
	L	4
	Long	4000K

STANDARD – 3000K – 4000K

TYPE	CCT	TYPE	POWER	IP	IK	LUMENS (lm)
REI	3000K	Short	4.2W	IP65	IK08	380lm
REI	4000K	Short	4.2W	IP65	IK08	380lm
REI	3000K	Long	4.2W	IP65	IK08	397lm
REI	4000K	Long	4.2W	IP65	IK08	397lm

