



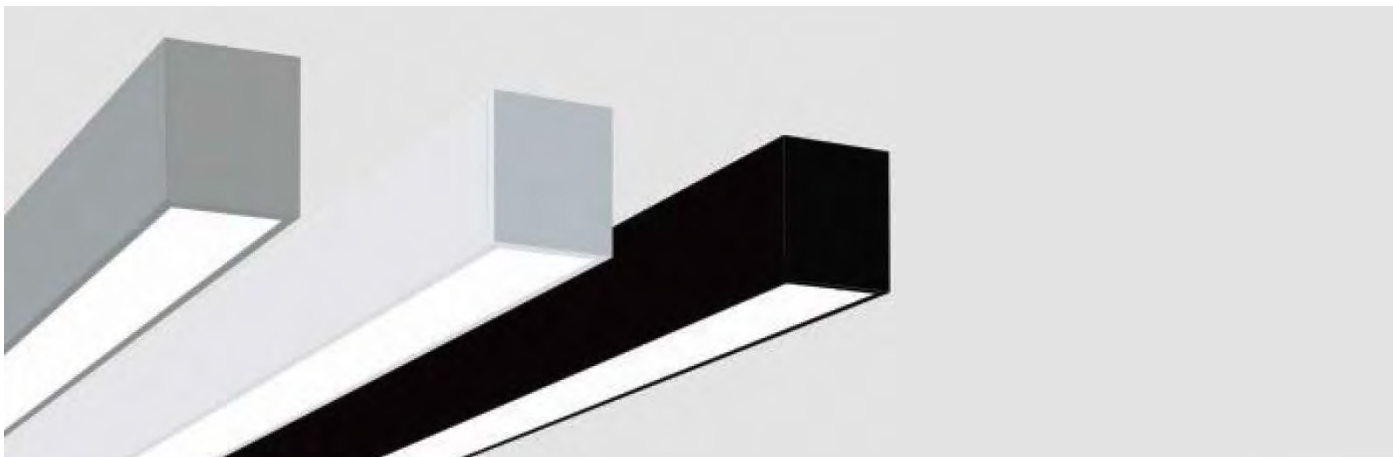


KEY FEATURES

- Direct, extruded linear profile luminaire
- Suitable for surface mount or suspension fixing
- Finished in RAL 9006 grey as standard
- Available in 4 standard lengths
- Delivering approx. 2200lm per meter as standard
- Coloured matched, injection moulded end caps
- TPa opal lens for feature, general and visual areas
- Low Glare prismatic lens available for office and LG7 compliance
- Tridonic low energy LED and driver system
- Life up to >72,000 hours L80/F10
- Efficacy up to 127 lm/tcW

DIMENSIONS

852 mm
1271 mm
1550 mm

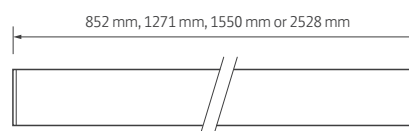

ORDERING INFORMATION

OPTIONS

Length	Colour	Luminaire Output (lm) Std	Model Ref.	Luminaire Output (lm) /LO	Luminaire Output (lm) /HO
850 mm	830	1725	ROS-D-18-3-G-0.85M	1175	2725
850 mm	840	1825	ROS-D-18-4-G-0.85M	1225	2875
1.2 m	830	2575	ROS-D-25-3-G-1.2M	1750	4100
1.2 m	840	2725	ROS-D-25-4-G-1.2M	1850	4300
1.5 m	830	3150	ROS-D-31-3-G-1.5M	2150	5000
1.5 m	840	3325	ROS-D-31-4-G-1.5M	2250	5250
2.5 m	830	5150	ROS-D-50-3-G-2.5M	3500	8175
2.5 m	840	5425	ROS-D-50-4-G-2.5M	3675	8575

Please select from the options below.


White body	/W
Black body	/B
Lower output	/LO
Higher output	/HO
Low glare prismatic lens for LG7 compliance	/LG
SwitchDIM, DALI or DSI	/ECO
EM conversion (not 163.001 / 163.002)	/EMI
Suspension kit	/SUS
Butt joint	/BU




/W
White body



/B
Black body



/LO
Lower output




/HO
Higher output



/ECO
SwitchDIM, DALI or DSI




/EMI
EM conversion (not 163.001 / 163.002)



/LG
Low glare prismatic lens

Accessories

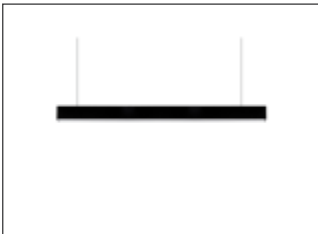

SUS
2M 2pcs suspension kit
(not 2.5 m)



SUS3
2M 3pcs suspension kit
(for 2.5 m)



180
180° Butt joint bracket



90
90° Butt joint bracket