


SPECIFICATION

|                          |                                                                  |          |          |
|--------------------------|------------------------------------------------------------------|----------|----------|
| Distribution             | Direct                                                           |          |          |
| Colour Temperature CCT   | 3000K   4000K                                                    |          |          |
| Optic/Diffuser           | Opal                                                             |          |          |
| Power                    | 15.4W                                                            | 21.5W    | 27.3W    |
| Luminaire Lumens @4k     | 2034 lm                                                          | 2822 lm  | 3478 lm  |
| Efficacy                 | 132 lm/W                                                         | 131 lm/W | 127 lm/W |
| Current                  | 500 mA                                                           | 700 mA   | 900 mA   |
| Options                  | Open face   hood   grill                                         |          |          |
| Finish                   | Black   aluminium                                                |          |          |
| CRI                      | 80+                                                              |          |          |
| Dimensions - open        | Ø368 x D 146 mm                                                  |          |          |
| Dimensions – hood/grille | Ø368 x D 171 mm                                                  |          |          |
| Controls                 | Fixed output as standard   DALI                                  |          |          |
| Installation             | Surface-mounted/wall                                             |          |          |
| Material                 | Aluminium base/bezel, polycarbonate diffuser, silicone gasket    |          |          |
| Ingress Protection       | IP65                                                             |          |          |
| Impact Rating            | IK10                                                             |          |          |
| Operating Voltage        | 220-240V 50/60Hz                                                 |          |          |
| Lifetime                 | 50,000hrs                                                        |          |          |
| Operating Temperature    | -25°C ~35°C                                                      |          |          |
| Conformity               | UKCA, CE, RoHS, UV stabilized, TP(a) certified, glow-wire tested |          |          |
| Warranty                 | 5 Years                                                          |          |          |



DIMENSIONS/PHOTOMETRY

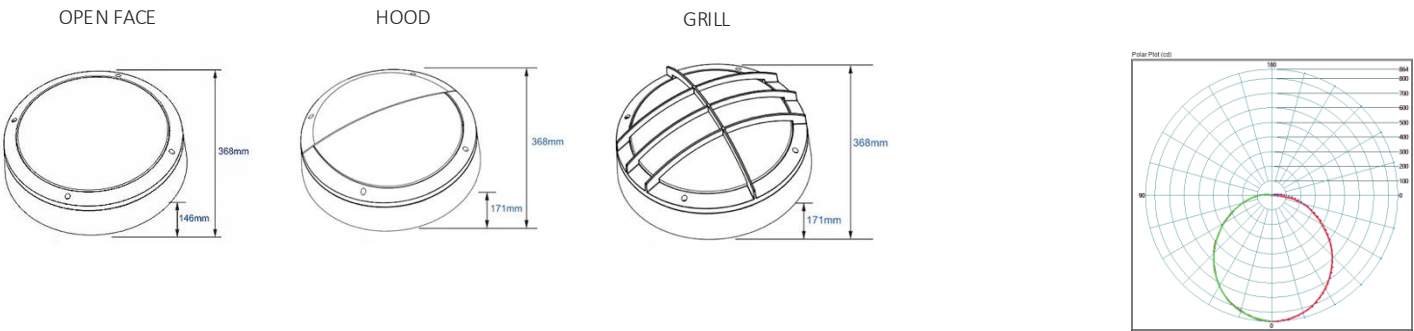

ORDER CODE SHIELD-O-15-3-A

| PREFIX  | DISTRIBUTION          | POWER              | CCT               | FINISH                |
|---------|-----------------------|--------------------|-------------------|-----------------------|
| SHIELD- | <b>O</b><br>Open face | <b>15</b><br>15.4W | <b>3</b><br>3000K | <b>B</b><br>Black     |
|         | <b>H</b><br>Hood      | <b>21</b><br>21.5W | <b>4</b><br>4000K | <b>A</b><br>Aluminium |
|         | <b>G</b><br>Grill     | <b>27</b><br>27.3W |                   |                       |

OPTIONS

| CODE  | DESCRIPTION        |
|-------|--------------------|
| - D   | DALI               |
| - EM  | Standard emergency |
| - EMD | DALI emergency     |

