



SPECIFICATION

Distribution	Direct spotlight
Colour Temperature CCT	3000K 4000K
Optic/Beam	2° 8° 12° 30° 10x70°
Output	10W
Finish	Grey RAL9023
Efficacy	Up to 83 lm/W
CRI	80+
SDCM	5
Controls	Fixed output
Installation	Surface-mounted
Connection	Cable, 0.5m, 3x1.0mm ²
Length	86 mm
Diameter	50 mm
Height	81 mm
Material	Aluminium/tempered glass
Ingress Protection	IP66
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	80000/L80B50
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.4kg
Warranty	5 Years
Optional (please ask)	In-ground spike

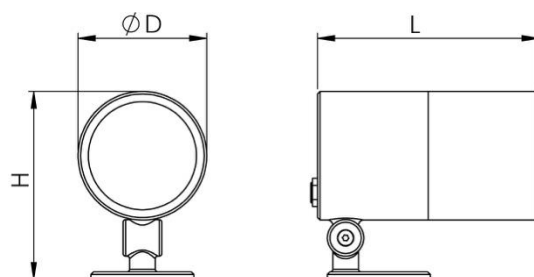

PHOTOMETRY

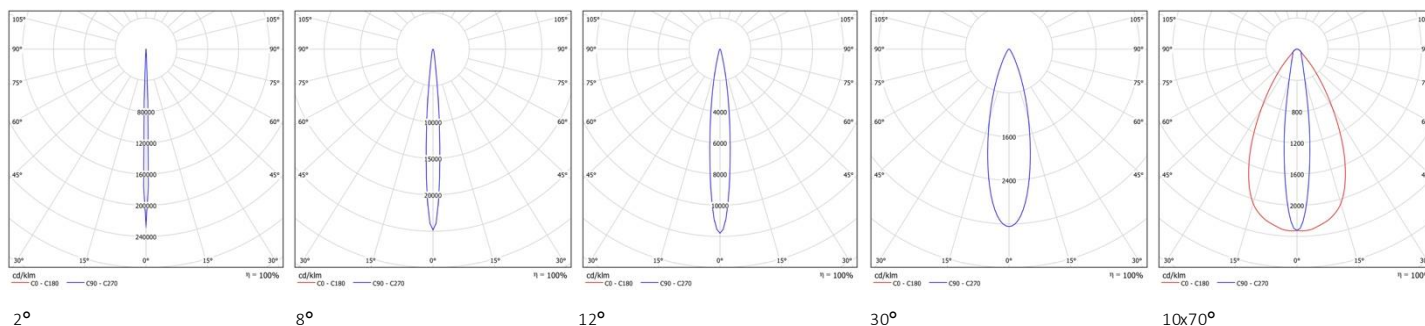

ORDER CODE

SHOW-S-3-2-G

PREFIX	TYPE	CCT	OPTIC/BEAM	FINISH	OPTIONS
SHOW-	S Small	3 3000K 4 4000K	2 2° pin 8 8° narrow 12 12° small 30 30° medium 1070 10x70° elliptical beam	G Grey RAL9023	SPIKE In-ground spike

STANDARD – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	IP	IK	LUMENS (lm)
SHOW-S	3000K	2°	10W	IP66	IK08	500lm
SHOW-S	3000K	8°	10W	IP66	IK08	800lm
SHOW-S	3000K	12°	10W	IP66	IK08	800lm
SHOW-S	3000K	30°	10W	IP66	IK08	800lm
SHOW-S	3000K	10x70°	10W	IP66	IK08	800lm
SHOW-S	4000K	2°	10W	IP66	IK08	500lm
SHOW-S	4000K	8°	10W	IP66	IK08	832lm
SHOW-S	4000K	12°	10W	IP66	IK08	832lm
SHOW-S	4000K	30°	10W	IP66	IK08	832lm
SHOW-S	4000K	30°	10W	IP66	IK08	832lm

