


SPECIFICATION


Distribution	Direct
Colour Temperature CCT	3000K 4000K
Optic	Opal polycarbonate
Output	13.8W 19.5W 23.6W
Finish	Grey RAL7043
Efficacy	83 lm/W
CRI	80+
SDCM	3
Controls	Fixed output DALI
Installation	Wall or ceiling
Connection	Screw terminal, 3x2x2.5 mm ²
Dimensions	Ø360 x 130 mm
Dimensions – with louver	Ø360 x 450 mm
Material	Aluminium/polycarbonate
Ingress Protection	IP65
Impact Rating	IK10
Operating Voltage	220-240V 0/50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-20°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I, UV stable
Weight	1.5-3.2kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

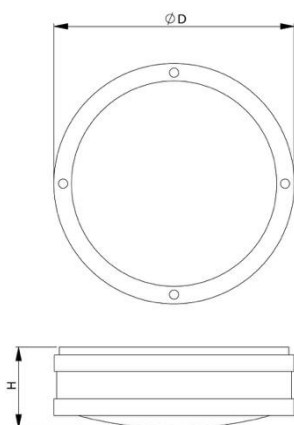

Open

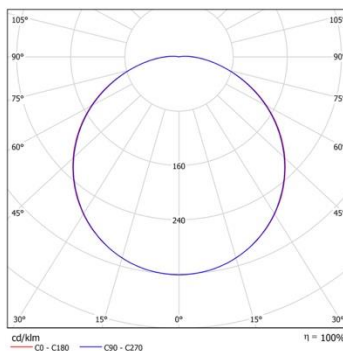

With Louver

