


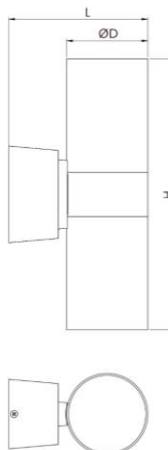


SPECIFICATION

Distribution	Direct Direct/indirect
Colour Temperature CCT	3000K 4000K
Optic/Beam	40° Lens
Output	4.2W 8.4W
Finish	Grey RAL7043
Efficacy	95 lm/W
CRI	80+
Controls	Fixed output
Installation	Wall
Connection	On the wall. Screw terminal, 3x1x1.5 mm ²
Dimensions - Dir	Ø90 x H160 mm
Dimensions – Dir/Ind	Ø90 x H300 mm
Material	Aluminium/tempered glass
Ingress Protection	IP54
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	15000/L70B50
Operating Temperature	-24°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	1.4kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

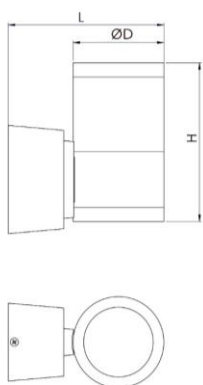

ORDER CODE

TALA-DI-3-40-G

PREFIX	DISTRIBUTION	CCT	OPTIC/BEAM	FINISH
TALA-	D Direct	3 3000K	40 40° lens	G Grey RAL7043
	DI Direct/indirect	4 4000K		

STANDARD – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	IP	IK	LUMENS (lm)
TALA	3000K	40°	4.2W	IP54	IK08	363lm
TALA	3000K	40°	8.4W	IP54	IK08	760lm
TALA	4000K	40°	4.2W	IP54	IK08	397lm
TALA	4000K	40°	8.4W	IP54	IK08	794lm

