





SPECIFICATION

Distribution	Direct accent light
Colour Temperature CCT	3000K 4000K
Optic	Aluminium reflector
Beam Angle	15° 25° 45°
Output	8W
Finish	Black RAL9005
Efficacy	115 lm/W
CRI	80+
SDCM	5
Controls	Fixed output
Installation	On-ground long spike
Connection	Cable, 0.45m, 3x1.0mm ²
Dimensions	L 104 x W 80 x H 309 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK06
Operating Voltage	220-240V 50/60Hz
Lifetime	50000/L80B10
Operating Temperature	-25°C ~45°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.4kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

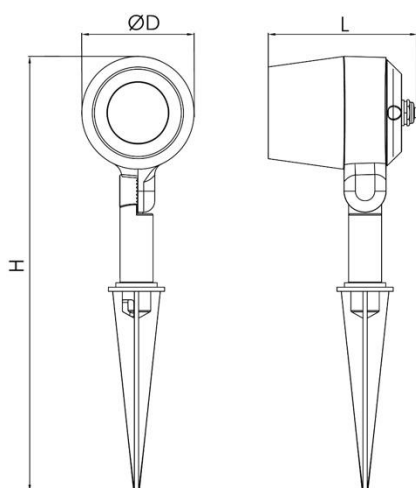

ORDER CODE

TALI-L-3-15-B

PREFIX	TYPE	CCT	BEAM ANGLE	FINISH
TALI-	L In-ground long spike	3 3000K 4 4000K	15 15° beam angle 25 25° beam angle 45 45° beam angle	B Grey

STANDARD – 3000K – 4000K

TYPE	CCT	POWER	BEAM ANGLE	IP	IK	LUMENS (lm)
TOMM	3000K	8W	15°	IP65	IK06	852lm
TOMM	3000K	8W	25°	IP65	IK06	854lm
TOMM	3000K	8W	45°	IP65	IK06	857lm
TOMM	4000K	8W	15°	IP65	IK06	909lm
TOMM	4000K	8W	25°	IP65	IK06	903lm
TOMM	4000K	8W	45°	IP65	IK06	916lm

OPTIONS

TALI-ACC-SUR	Surface mounting kit
--------------	----------------------

