


SPECIFICATION

Distribution	Direct (up or down) Direct/indirect
Colour Temperature CCT	3000K 4000K
Optic/Beam	30° 45° 60°
Output	9.6W - 38.4W
Finish	Grey RAL7043
Efficacy	Up to 115 lm/W
CRI	80+
SDCM	3
Controls	Fixed output
Installation	Wall Ceiling/Surface-mounted
Connection	On the wall. Screw terminal, 3x1x1.5 mm ²
Dimensions - Dir	Ø155 x H 464 mm
Dimensions – Dir/Ind	Ø155 x H 250 mm
Dimensions – Ceiling/Surface	Ø155 x H 250 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	60000/L80B10
Operating Temperature	-24°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	2.2-3.2kg
Warranty	5 Years



DIMENSIONS

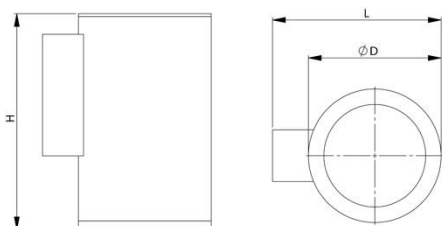


ORDER CODE TARA-D-3-30-1-G

PREFIX	DISTRIBUTION	CCT	OPTIC/BEAM	OUTPUT	FINISH
TARA-	D	3	30	1	G Grey RAL7043
	Direct	3000K	30° lens	Low	
	DI	4	45	2	
	Direct/indirect	4000K	45° lens	Standard	
	SUR		60	3	
	Ceiling/surface		60° lens	Medium	




STANDARD – DIR – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	IP	IK	LUMENS (lm)	ORDER CODE
TARA	3000K	30°	9.6W	IP65	IK08	1031lm	TARA-D-3-30-G
TARA	3000K	30°	13.1W	IP65	IK08	1415lm	TARA-D-3-30-G
TARA	3000K	30°	19.4W	IP65	IK08	1964lm	TARA-D-3-30-G
TARA	4000K	30°	9.6W	IP65	IK08	1058lm	TARA-D-4-30-G
TARA	4000K	30°	13.1W	IP65	IK08	1451lm	TARA-D-4-30-G
TARA	4000K	30°	19.4W	IP65	IK08	2013lm	TARA-D-4-30-G
TARA	3000K	45°	9.6W	IP65	IK08	1031lm	TARA-D-3-45-G
TARA	3000K	45°	13.1W	IP65	IK08	1415lm	TARA-D-3-45-G
TARA	3000K	45°	19.4W	IP65	IK08	1964lm	TARA-D-3-45-G
TARA	4000K	45°	9.6W	IP65	IK08	1058lm	TARA-D-4-45-G
TARA	4000K	45°	13.1W	IP65	IK08	1451lm	TARA-D-4-45-G
TARA	4000K	45°	19.4W	IP65	IK08	2013lm	TARA-D-4-45-G
TARA	3000K	60°	9.6W	IP65	IK08	1059lm	TARA-D-3-60-G
TARA	3000K	60°	13.1W	IP65	IK08	1452lm	TARA-D-3-60-G
TARA	3000K	60°	19.4W	IP65	IK08	2016lm	TARA-D-3-60-G
TARA	4000K	60°	9.6W	IP65	IK08	1086lm	TARA-D-4-60-G
TARA	4000K	60°	13.1W	IP65	IK08	1489lm	TARA-D-4-60-G
TARA	4000K	60°	19.4W	IP65	IK08	2067lm	TARA-D-4-60-G

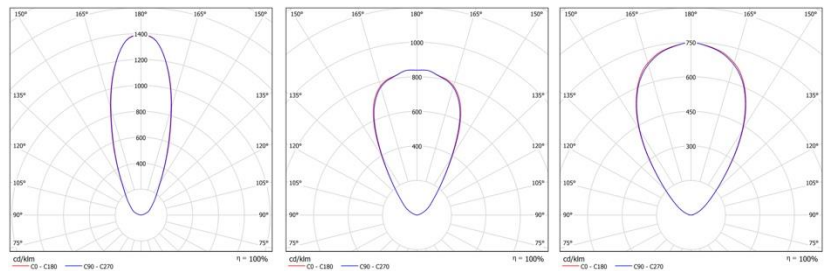

STANDARD – DIR/IND – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	IP	IK	LUMENS (lm)	ORDER CODE
TARA	3000K	2x30°	19.3W	IP65	IK08	2063lm	TARA-DI-3-30-G
TARA	3000K	2x30°	26W	IP65	IK08	2829lm	TARA-DI-3-30-G
TARA	3000K	2x30°	38.4W	IP65	IK08	3927lm	TARA-DI-3-30-G
TARA	4000K	2x30°	19.3W	IP65	IK08	2115lm	TARA-DI-4-30-G
TARA	4000K	2x30°	26W	IP65	IK08	2901lm	TARA-DI-4-30-G
TARA	4000K	2x30°	38.4W	IP65	IK08	4026lm	TARA-DI-4-30-G
TARA	3000K	2x45°	19.3W	IP65	IK08	2063lm	TARA-DI-3-45-G
TARA	3000K	2x45°	26W	IP65	IK08	2829lm	TARA-DI-3-45-G
TARA	3000K	2x45°	38.4W	IP65	IK08	3927lm	TARA-DI-3-45-G
TARA	4000K	2x45°	19.3W	IP65	IK08	2115lm	TARA-DI-4-45-G
TARA	4000K	2x45°	26W	IP65	IK08	2901lm	TARA-DI-4-45-G
TARA	4000K	2x45°	38.4W	IP65	IK08	4026lm	TARA-DI-4-45-G
TARA	3000K	2x60°	19.3W	IP65	IK08	2118lm	TARA-DI-3-60-G
TARA	3000K	2x60°	26W	IP65	IK08	2904lm	TARA-DI-3-60-G
TARA	3000K	2x60°	38.4W	IP65	IK08	4032lm	TARA-DI-3-60-G
TARA	4000K	2x60°	19.3W	IP65	IK08	2171lm	TARA-DI-4-60-G
TARA	4000K	2x60°	26W	IP65	IK08	2978lm	TARA-DI-4-60-G
TARA	4000K	2x60°	38.4W	IP65	IK08	4133lm	TARA-DI-4-60-G

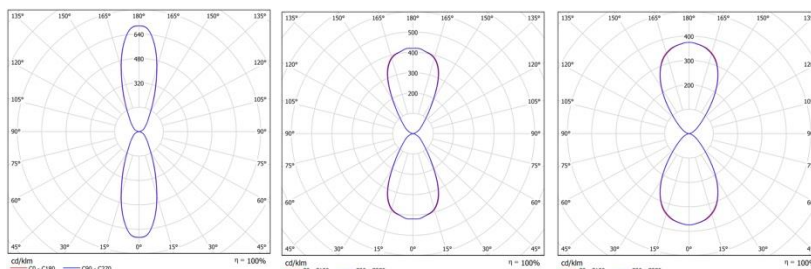

STANDARD – CEILING/SURFACE – 3000K – 4000K

TYPE	CCT	OPTIC/BEAM	POWER	IP	IK	LUMENS (lm)	ORDER CODE
TARA	3000K	30°	9.6W	IP65	IK08	1031lm	TARA-SUR-3-30-G
TARA	3000K	30°	13.1W	IP65	IK08	1415lm	TARA-SUR-3-30-G
TARA	3000K	30°	19.4W	IP65	IK08	1964lm	TARA-SUR-3-30-G
TARA	4000K	30°	9.6W	IP65	IK08	1058lm	TARA-SUR-4-30-G
TARA	4000K	30°	13.1W	IP65	IK08	1451lm	TARA-SUR-4-30-G
TARA	4000K	30°	19.4W	IP65	IK08	2013lm	TARA-SUR-4-30-G
TARA	3000K	45°	9.6W	IP65	IK08	1031lm	TARA-SUR-3-45-G
TARA	3000K	45°	13.1W	IP65	IK08	1415lm	TARA-SUR-3-45-G
TARA	3000K	45°	19.4W	IP65	IK08	1964lm	TARA-SUR-3-45-G
TARA	4000K	45°	9.6W	IP65	IK08	1058lm	TARA-SUR-4-45-G
TARA	4000K	45°	13.1W	IP65	IK08	1451lm	TARA-SUR-4-45-G
TARA	4000K	45°	19.4W	IP65	IK08	2013lm	TARA-SUR-4-45-G
TARA	3000K	60°	9.6W	IP65	IK08	1059lm	TARA-SUR-3-60-G
TARA	3000K	60°	13.1W	IP65	IK08	1452lm	TARA-SUR-3-60-G
TARA	3000K	60°	19.4W	IP65	IK08	2016lm	TARA-SUR-3-60-G
TARA	4000K	60°	9.6W	IP65	IK08	1086lm	TARA-SUR-4-60-G
TARA	4000K	60°	13.1W	IP65	IK08	1489lm	TARA-SUR-4-60-G
TARA	4000K	60°	19.4W	IP65	IK08	2067lm	TARA-SUR-4-60-G

