



SPECIFICATION

Distribution	Direct accent light
Colour Temperature CCT	3000K 4000K
Optic	Clear tempered glass 40° beam
Output	4.2W
Finish	Grey RAL7043
Efficacy	93 lm/W
CRI	80+
SDCM	5
Controls	Fixed output
Installation	On the horizontal or vertical surface
Connection	Cable, 0.35m, 3x1.0mm ²
Dimensions - Short	L 98 x W 98 x H 159 mm
Dimensions – Ground Spike	L 98 x W 98 x H 328 mm
Material	Aluminium/tempered glass
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.38kg
Warranty	5 Years

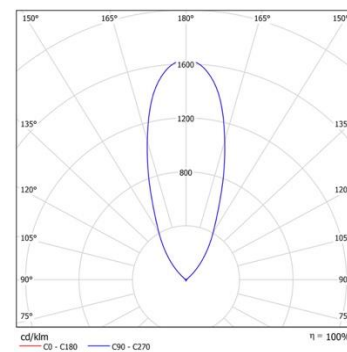

DIMENSIONS/PHOTOMETRY

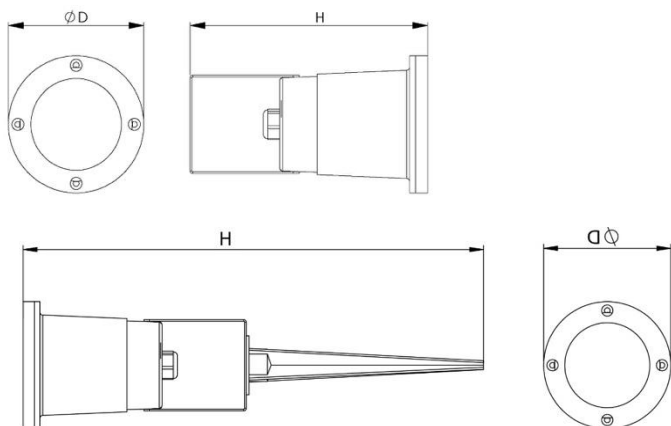

ORDER CODE TOMM-S-3-C-G

PREFIX	TYPE	CCT	OPTIC	FINISH
TOMM-	S Short/standard	3 3000K	C Clear	G Grey
	G Ground-spike	4 4000K		

STANDARD – 3000K – 4000K

TYPE	CCT	TYPE	POWER	IP	IK	LUMENS (lm)
TOMM	3000K	Short/standard	4.2W	IP65	IK08	375lm
TOMM	4000K	Short/standard	4.2W	IP65	IK08	375lm
TOMM	3000K	Ground-spike	4.2W	IP65	IK08	392lm
TOMM	4000K	Ground-spike	4.2W	IP65	IK08	392lm

