



SPECIFICATION

Distribution	Direct/indirect façade illumination
Colour Temperature CCT	4000K
Optic/Beam	2x60°
Output	6.7W
Finish	Grey RAL7043
Efficacy	77 lm/W
Lumen Output	510lm
CRI	80+
SDCM	5
Controls	Fixed output
Installation	Surface-mounted
Connection	On the wall. Screw terminal, 3x1x1.5 mm ²
Length	125 mm
Width	90 mm
Height	80 mm
Material	Aluminium/tempered glass
Ingress Protection	IP54
Impact Rating	IK08
Operating Voltage	220-240V 50/60Hz
Lifetime	40000/L70B50
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	0.6kg
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

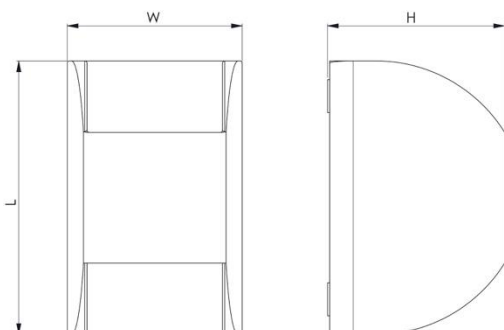

ORDER CODE

ULO-DI-4-60-G

PREFIX	DISTRIBUTION	CCT	OPTIC/BEAM	FINISH
ULO-	DI Direct/indirect	4 4000K	60 60° medium	G Grey RAL7043

