




KEY FEATURES

- Highly performance, high output, LED track spotlight
- High efficient passive heatsink
- Low glare 40° multi-faceted reflector as standard
- Compatible with Global Trac, Stucchi and Eutrac systems
- RAL 9016 white with RAL9007 grey heatsink as standard
- DALI dimming option
- Life >55,000 hours (L80 / F10)

DIMENSIONS

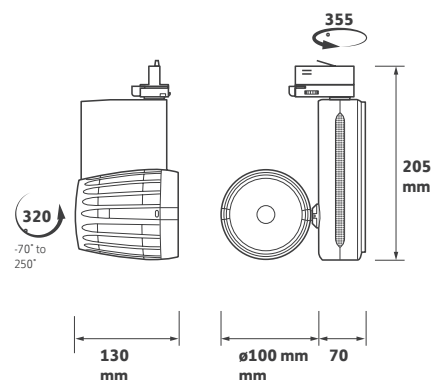


ORDERING INFORMATION

OPTIONS

Luminaire Output (lm)	Power (tcW)	Colour	Model Ref.
3200	27.0	830	VAN-27-3-W
3300	27.0	840	VAN-27-4-W
4000	35.0	830	VAN-35-3-W
4150	35.0	840	VAN-35-4-W
4575	41.5	830	VAN-41-3-W
4675	41.5	840	VAN-41-4-W

Please select from the options below.

Black body, grey heatsink	B-G
White body, white heatsink	W-W
Black body, black heatsink	B-B
SwitchDIM, DALI or DSI	/ECO
100,000 hour Tridonic Excite driver	/TOP
25° narrow beam	/NB
60° wide beam	/WB
Barn doors - Black	/BD
Snoot - Black	/SN

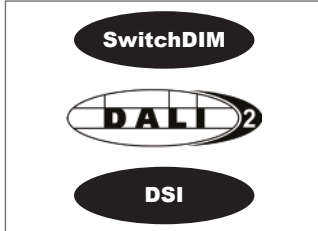

/ECO
SwitchDIM, DALI or DSI



/TOP
100,000 hour Tridonic Excite driver



/NB
25° narrow beam reflector



/WB
60° wide beam reflector



/BD
Barn doors - Black



/SN
Snoot - Black



9000/BP-D-W
Surface mounting pattress - White



9000/BP-D-B
Surface mounting pattress - Black



/HC
Honeycomb louvre



B-G
Black - RAL9005 Grey - RAL9007



W-W
White body and heatsink - RAL9016



/B-B
Black body and heatsink - RAL9005