



SPECIFICATION

Type	LED street luminaire
Distribution	Direct
Optic/Diffuser	Frosted polycarbonate diffuser
Power	18.6W 26.3W 34.3W 41.2W
Colour Temperature CCT	3000K 4000K
Efficacy	138lm
CRI	80+
Finish	Dark grey RAL7043
SDCM	3
Controls	Fixed output DALI
Installation	With three screws on poles Ø60mm
Connection	Cable, 3.0m, 3x0.75mm ²
Dimensions	L 420 x W 420 x H 420 mm
Material	Aluminium
Ingress Protection	IP65
Impact Rating	IK08
Operating Voltage	220-240V, 50-60Hz
Lifetime	50000/L80B10
Operating Temperature	-25°C ~40°C
Conformity	UKCA, CE, RoHS, IEC:I
Weight	4.9kg
Optional	Photocell PCA switch II protection class
Warranty	5 Years



DIMENSIONS/PHOTOMETRY

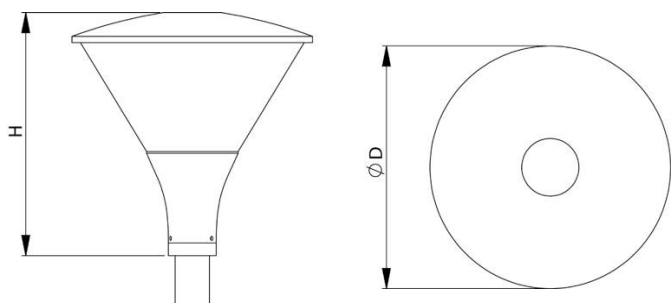

ORDER CODE

VOA-3-FR-18.6W

PREFX	CCT	DIFFUSER/OPTIC	OUTPUT
VOA-	3	FR Frosted	18.6W
	3000K		Low
	4		26.3W
	4000K		Standard
			34.3W
			Medium
			41.2W
			High

OPTIONS

VOA-ACC-PCA	Photocell 20mm miniature type, IP65, 35 lux; 1:05 ratio
VOA-ACC-II	Electric shock protection class II



Optional: photocell PCA automatically switches lights ON at dusk and OFF at dawn. It can be integrated into IP-rated fittings as a standalone solution. Features: built-in light sensor, IP65 dust/waterproof, 35 lux threshold, 1:05 ratio.



STANDARD SPEC – 3000K – 4000K

DIMENSIONS (mm)	CCT	POWER	DIFFUSER/OPTIC	LUMENS (lm)
420x420x420mm	3000K	18.6W	Frosted	2536lm
420x420x420mm	3000K	26.3W	Frosted	3455lm
420x420x420mm	3000K	34.4W	Frosted	4318lm
420x420x420mm	3000K	41.2W	Frosted	4962lm
420x420x420mm	4000K	18.6W	Frosted	2655lm
420x420x420mm	4000K	26.3W	Frosted	3617lm
420x420x420mm	4000K	34.4W	Frosted	4521lm
420x420x420mm	4000K	41.2W	Frosted	5195lm