


SPECIFICATION

Light Source	2 x 2W LED
Lumen Output	2 x 110 lumens
Colour Temperature CCT	5000K
Power	6.5W (max.)
Power Rating – Charging	2.5W
Input Voltage	230-240V AC 50/60Hz
Emergency	Standard Maintained
Beam	Narrow Spot Wide Flood
Duration	3 hours
Recharge Duration	24 hours
Battery Type	2 x 3.6V 1.5Ah NiMH
Ingress Protection	IP20
Electrical Class	II
Operating Temperature	0°C ~ 25°C
Finish	White Black
Dimensions	186mm (W) x 108mm (H) x 55mm (D)
Installation	Surface/wall
Material	Polycarbonate body and lenses
Cable Entry	20mm knock-outs top and back
Weight	2kg
Conformity	UKCA, CE, RoHS, EN60598.2.22
Warranty	5 Years



DIMENSIONS

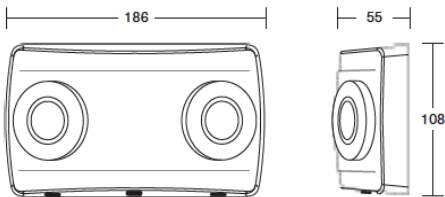

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-EL-TWIN-MINI-STD-NS-WH	EL IP20 Mini Twin beam 2x110lm Narrow Spot Standard Emergency White
EM-EL-TWIN-MINI-STD-WF-WH	EL IP20 Mini Twin beam 2x110lm Wide Flood Standard Emergency White
EM-EL-TWIN-MINI-STD-NS-BLK	EL IP20 Mini Twin beam 2x110lm Narrow Spot Standard Emergency Black
EM-EL-TWIN-MINI-STD-WF-BLK	EL IP20 Mini Twin beam 2x110lm Wide Flood Standard Emergency Black

