




SPECIFICATION

High Lumen Output	320 lm
Low Lumen Output	170 lm
Input Voltage	AC200-240V AC 50Hz
Power	Maintained 3W Non-Maintained 0.5W
Duration	3 hours
Recharge Duration	24 hours
Battery Type	Li-ion 3.6V 2.5Ah
Ingress Protection	IP65
Impact Rating	IK10
Insulation Class	II
Operating Temperature	0°C ~ 40°C
Storage Temperature	0°C ~ 50°C
Material	Polycarbonate
Finish	Matt White
Dimensions	L 355mm x W 109 mm x D 60 mm
Installation	Surface
Legend Panels	Supplied with self-adhesive legend kit (Arrow Up, Down, Left/Right)
Lifetime	50,000hrs
Weight	0.5kg
Conformity	UKCA, CE, RoHS, BS 60598-2-22 and ISO 7010
Warranty	5 Years

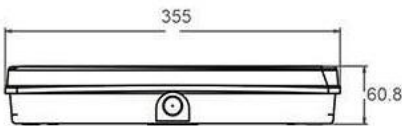

DIMENSIONS



PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-FX-BH200-IP65-LO-STD-ST	IP65 Bulkhead - Standard/Self-test 200LM c/w Legend Kit
EM-FX-BH325-IP65-MO-STD-ST	IP65 Bulkhead - Standard/Self-test 325LM c/w Legend Kit
EM-FX-BH325-IP65-MO-DALI	IP65 Bulkhead - DALI-2 325LM c/w Legend Kit
EM-FX-BH400-IP65-HO-STD-ST	IP65 High Output Bulkhead - Standard/Self-test 400lm c/w Legend Kit
EM-FX-BH800-IP65-HO-STD-ST	IP65 High Output Bulkhead - Standard/Self-test 800lm c/w Legend Kit
EM-FX-BHREC-KIT	Semi recessed mounting kit

