


SPECIFICATION

Installation	Surface/ceiling
Viewing Distance	25m
Colour Temperature CCT	4000K
Input Voltage	230-240V 50Hz
Power	5W
Duration	3 hours
Battery Type	1 x 18650 Li-ion 3.6V 2.5Ah
Recharge Period	8-16 hours
Charge Current	225mA nominal
Ingress Protection	IP20
Impact Rating	IK06
Material	Polycarbonate/Nickel Steel Screws
Version	Self-test DALI
Finish	Matt White
Dimensions	W 341 mm x H 247 mm x D 46 mm
Legend Panels	Arrow Up Arrow Down Arrow Left/Right
Temperature	0°C ~ 40°C
Weight	0.9kg
Conformity	UKCA, Class II,
LED Lifetime	50,000 hrs
Warranty	5 Years



DIMENSIONS

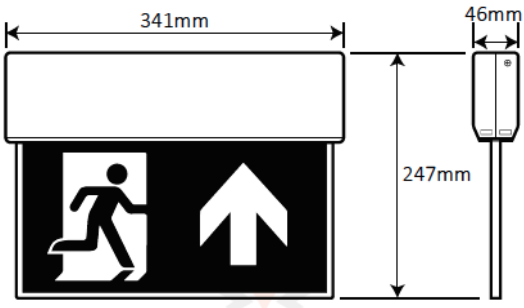

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-FX-SIGN2-30M-WC-STD-ST-AU	Exit Blade 30M Standard/Self-test C/W Arrow Up legend White
EM-FX-SIGN2-30M-WC-DALI-AU	Exit Blade 30M DALI C/W Arrow Up legend White
EM-FX-SIGN2-30M-WC-STD-ST-AU-BL	Exit Blade 30M Standard/Self-test C/W Arrow Up legend Black
EM-FX-SIGN2-30M-WC-DALI-AU-BL	Exit Blade 30M DALI C/W Arrow Up legend Black
EM-FX-SIGN2-REC-KIT	SIGN2 Recessing Kit White
EM-FX-SIGN2-REC-KIT-BL	SIGN2 Recessing Kit Black
EM-FX-SIGN2-SUSP-KIT	SIGN2 Suspension Kit
EM-FX-SIGN2-LEG-AD	SIGN2 Legend Arrow Down
EM-FX-SIGN2-LEG-ALAR	SIGN2 Legend Arrow Left/Right

