


SPECIFICATION

Light Source	LED
Lumen Output	Low - 440lm (220lm per head) High- 1000lm (500lm per head)
Colour Temperature CCT	4000K
Power	5W
Power - Standby	<0.5W
Power – Emergency Output	3W
Input Voltage	230-240V AC 50/60Hz
Version	Non-maintained
Emergency	Standard DALI self-test
Duration	3 hours
Recharge Duration	8 hours (initial 16hrs)
Recharge Duration - DALI	20 hours
Battery Type	18650 Li-ion 3.6V 5.0Ah
Ingress Protection	IP65
Impact Rating	IK10
Electrical Class	II
Operating Temperature	0°C ~ 40°C
Finish	Matt white
Dimensions	226 x 227 x 60mm
Installation	Surface/wall
Material	Polycarbonate/nickel steel screws
Weight	0.6-0.8kg
Conformity	UKCA, CE, RoHS,
Lifetime	50,000 hrs
Warranty	5 Years



DIMENSIONS

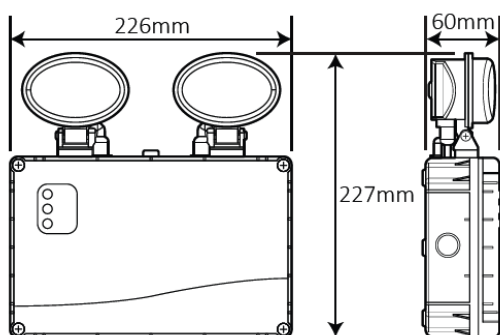

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-FX-TWIN-IP65-LO-ST-WH	FX IP65 Low Output Twin Spot – 2X220LM Self-test
EM-FX-TWIN-IP65-HO-ST-WH	FX IP65 High Output Twin Spot 2X500LM - Self-test
EM-FX-TWIN-IP65-LO-DALI-WH	FX IP65 Low Output Twin Spot - 2X220LM DALI-2