


SPECIFICATION

Emergency	Standard Dali	
Operation	Non-maintained Maintained	
Colour Temperature CCT	4000K	
Version	Low	High
Power Rating - Non-Maintained	1.4W	1.3W
Power Rating - Maintained	12.4W	13.2W
Em Lumen Output	358lm	842/911lm
Battery Type	3.2V 3.8Ah LiFePO4	6.4V 4.8Ah LiFePO4
Input Voltage	AC200-240V AC 50Hz	
Duration	3 hours	
Recharge Duration	24 hours	
Charge Current	225mA nominal	
Standard Lumen Output	1163	
Ingress Protection	IP65	
Impact Rating	IK10	
Insulation Class	II	
Storage Temperature	0°C ~ 50°C	
Material	Polycarbonate	
Finish	White	
Dimensions	370mm x 140mm x 89mm	
Installation	Surface	
Legend Panels	Self-adhesive legend kit available	
Lifetime	50,000hrs	
Weight	2.1kg	
Conformity	UKCA, CE, RoHS	
Warranty	5 Years	



DIMENSIONS

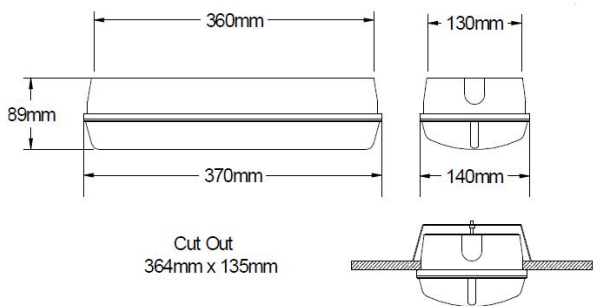

PRODUCT ORDER CODE

CODE	PRODUCT SPECIFICATION
EM-LP-BH-IP65-LO-STD-NM	IP65 Bulkhead, Low Output, Standard Non-maintained
EM-LP-BH-IP65-LO-STD-M	IP65 Bulkhead, Low Output, Standard Maintained
EM-LP-BH-IP65-LO-DALI-NM	IP65 Bulkhead, Low Output, DALI Self-test Non-maintained
EM-LP-BH-IP65-LO-DALI-M	IP65 Bulkhead, Low Output, DALI Self-test Maintained
EM-LP-BH-IP65-HO-STD-NM	IP65 Bulkhead, High Output, Standard Non-maintained
EM-LP-BH-IP65-HO-STD-M	IP65 Bulkhead, High Output, Standard Maintained
EM-LP-BH-IP65-HO-DALI-NM	IP65 Bulkhead, High Output, DALI Self-test Non-maintained
EM-LP-BH-IP65-HO-DALI-M	IP65 Bulkhead, High Output, DALI Self-test Maintained
EM-LP-BH-REC-KIT	Semi-recessing kit, consisting of trim plate & mounting brackets
EM-LP-BH-LEG-KIT	Self-Adhesive Legend Kit to make IP65 Exit Sign

